

SIVER西菲尔



Door And Window Hardware Product Catalog

门窗五金产品目录

- \* All rights reserved.
- \* 版权由坚朗公司所有，严禁翻版和影印。
- \* 本公司产品已申请中国专利，严禁仿制，违者负法律责任。
- \* 2025年1月印刷

# SIVER西菲尔

源自欧洲 始于1904  
Originated from Europe Since 1904

## 门窗五金产品目录 Door And Window Hardware Product Catalog



广东坚朗五金制品股份有限公司  
Guangdong Kinlong Hardware Products Co., Ltd.

广东省东莞市塘厦镇坚朗路3号  
No.3,Jian Lang Rd.,Tangxia Town,Dongguan City,Guangdong Province,China  
T: 0769-82166666 82136666 H: www.kinlong.com  
F: 0769-82955240 82955241 E: mail@kinlong.com

源自欧洲 始于1904

SIVER西菲尔



Art of Beauty

Which Contains the Pursuit of Perfection

艺术之美 卓越品质



## DEVELOPMENT HISTORY 品牌发展历程



### 载入葡萄牙工业发展史册

在1961年6月，新版《葡萄牙工业史》出版了，重点介绍了CIFAL公司的历史

In June 1961, a new edition of the Portuguese Industrial History was published, focusing on the history of SIVER.



### 坚朗五金旗下品牌

西菲尔母公司CIFAL被KINLONG跨国集团收购并创立 **SIVER 西菲尔** 门窗五金品牌及相应的技术研究中心。

The parent company of CIFAL was acquired by the KINLONG multinational group and established the "SIVER" door and window hardware brand and corresponding technical research center.

1904

1961

**SIVER 西菲尔**

源自欧洲 始于1904  
Originated from Europe Since 1904

2000

2019

2024

### 诞生于葡萄牙波尔图

SIVER西菲尔的母公司Industrial de Ferragens, Lda, CIF成立，生产建筑五金

1904 SIVER's parent company Industrial de Ferragens, Lda, CIF was founded to produce building hardware.



### 享誉国际的设计

CIFAL收购了Aquatis所有股份并将其更名为：CIFIAL - Indústria Cerâmica, SA. 其产品享誉国际，并获DME奖

The parent company acquired all shares of Aquatis and renamed it CIFIAL - Indústria Cerâmica, SA. Its products are renowned internationally and have won the DME Award.



### 百年品牌新篇章

SIVER西菲尔葡萄牙公司CIFIAL120周年庆典，在德国纽伦堡市政厅隆重举行，未来可期

120th anniversary celebration held at the Nuremberg City Hall in Germany.







# DEVELOPMENT HISTORY

Hinge load curve  
铰链承载曲线图

铰链承载曲线图中的曲线表示每平方米玻璃的重量，在选配铰链时应根据每平方米玻璃重量，选择扇宽、扇高在对应曲线和斜线左侧范围，当窗扇宽≥660MM时，建议窗扇宽/高≤1.08；  
门窗扇总重量Q≈扇宽B×扇高H×玻璃厚度×玻璃比重Γ×型材比例系数；铰链承载力矩计算：铰链承载力矩M（X）=（窗重G·扇宽X）/2应在允许范围内选择使用。

The curve in the hinge bearing curve shows the weight of the glass per square meter. When selecting the hinge, the fan width and fan height should be selected according to the weight of the glass per square meter. When the window width is ≥ 660mm, it is recommended that the window width/height is ≤ 1.08. The total weight of the window sash Q Technologies the width of the fan B × the height of the fan H × the thickness of the glass × the relative weight of the glass γ × the comparative coefficient of the profile; the calculation of the hinge bearing moment: the hinge bearing moment M (x) = (window weight G · fan width x)/2 should be selected within the allowable range.

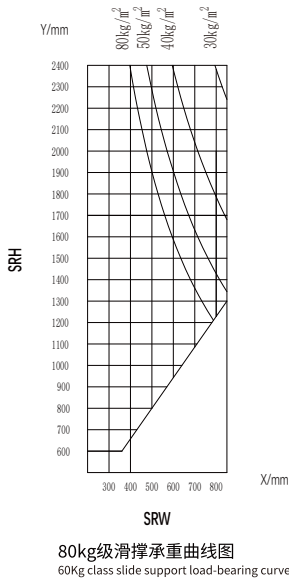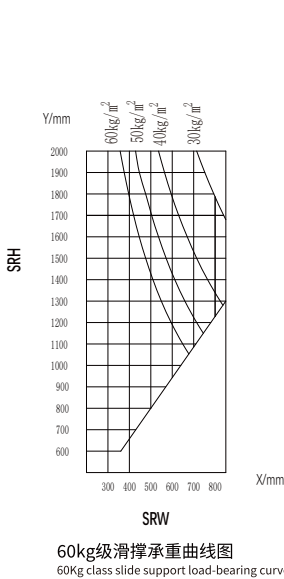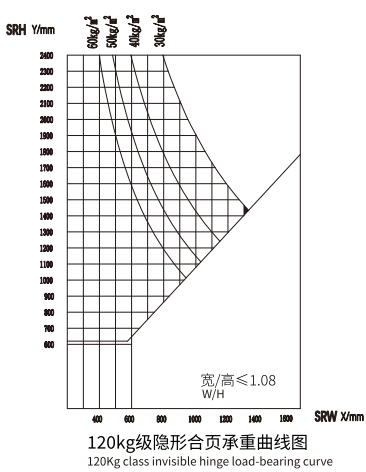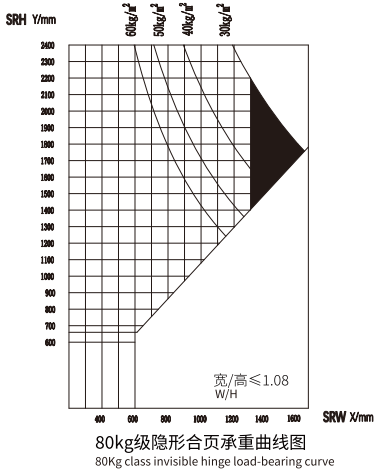

Maintenance and upkeep  
维护与保养

- 产品安装与使用说明 Product installation and instructions for use
  1. 阅读安装说明,按说明安装,安装后确认产品正常工作。  
Read the installation instructions, install according to the instructions, and confirm that the product is working normally after installation.
  2. 五金产品需配套使用,否则不享受售后服务。  
Hardware products need to be used together, otherwise they will not enjoy after-sales services.
  3. 门窗下垂、缝隙过大等问题,可通过调节五金件改善。  
Problems such as sagging doors and windows and large gaps can be improved by adjusting hardware.
  4. 严禁使用腐蚀性化学剂清洁、护理产品。  
It is strictly forbidden to use corrosive chemicals to clean and care products.
  5. 五金件应定期维护,经常去污、除尘,建议半年至少检修和保养一次。  
Hardware should be regularly maintained, decontaminated and dusted frequently. It is recommended to repair and maintain it at least once every six months.
  6. 定期检修活动构件和摩擦机构,加注润滑油,保持产品清洁、无阻塞。  
Regularly check the movable components and friction mechanisms, add lubricating oil, and keep the product clean and non-blocking.
- 注意事项 Precautions
  1. 产品应用基于常规环境,非常规环境下使用请提前与技术人员沟通确认可行性。  
The product application is based on the conventional environment. For use in unconventional environments, please communicate with the technical staff in advance to confirm the feasibility.
  2. 产品参数、图片仅供参考,以实物为准,不超出产品的使用技术参数范围。  
Product parameters and pictures are for reference only, subject to the actual product, and do not exceed the scope of technical parameters of the product.
  3. 产品技术升级,参数可能改变,恕不另行通知。  
Product technology upgrades, parameters may change without notice.
  4. 为减少售后问题,单品使用时请与技术人员沟通,确保产品安全及成套配置。  
In order to reduce after-sales problems, please communicate with technicians when using a single product to ensure product safety and complete configuration.
  5. 五金件承载力与门窗材质、玻璃厚度、宽高比例等有关,非标规格门窗选用时,请与技术人员联系。  
The bearing capacity of hardware is related to the material of doors and windows, glass thickness, width-to-height ratio, etc. When selecting non-standard doors and windows, please contact the technician.
  6. 适用窗型参数基于实验室环境测试和历史应用经验,具体请根据实际应用条件试装和确认,本图册参数不作为任何诉讼和赔偿依据。  
Applicable window parameters are based on laboratory environmental testing and historical application experience. Please try-install and confirm according to actual application conditions. The parameters of this atlas are not used as the basis for any litigation and compensation.
  7. 产品安装前禁止露天存放,避免暴晒、雨淋。  
It is forbidden to store the product in the open air before installation to avoid sun exposure and rain.





# CONTENTS 欧标C槽门窗五金目录


EUROPEAN STANDARD C SLOT DOORS AND WINDOWS HARDWARE CATALOG

## 五金系统 HARDWARE SYSTEM


|                                                                                                                                     |    |
|-------------------------------------------------------------------------------------------------------------------------------------|----|
| SIVER Standard系列 95°内平开下悬窗五金系统<br>SIVER Standard series 95 ° inner casement lower hanging window hardware system                    | 01 |
| SIVER Standard系列 180°内平开下悬窗五金系统<br>SIVER Standard series 180 ° inner casement lower hanging window hardware system                  | 03 |
| SIVER Professional系列 90°/180°内平开下悬窗五金系统<br>SIVER Professional series 90 °/180 ° inner casement lower hanging window hardware system | 05 |
| SIVER Porto.B系列外平开窗纱一体五金系统<br>SIVER Porto. B series outer casement window screen integrated hardware system                         | 07 |
| SIVER Standard系列 外平开窗纱一体五金系统<br>SIVER Standard series, outer casement window screen integrated hardware system                      | 09 |
| SIVER 内平开窗纱一体五金系统 (内玻外纱)<br>SIVER inner casement window screen integrated hardware system (inner glass and outer yarn)              | 11 |
| SIVER 内平开窗纱一体五金系统 (双内开)<br>SIVER inner casement window screen integrated hardware system (double inner opening)                     | 13 |
| SIVER 平开门五金系统<br>SIVER swing door hardware system                                                                                   | 15 |
| SIVER 上悬窗五金系统<br>SIVER Upper hanging window hardware system                                                                         | 17 |

## 产品系列 HARDWARE ITEMS

|                                                                   |    |
|-------------------------------------------------------------------|----|
| 执手系列<br>Handle series                                             | 19 |
| 拉杆&合页&滑撑系列<br>Tie Rod & Hinge & Slide Support Series              | 45 |
| 传动器系列<br>Actuator series                                          | 53 |
| 传动杆&锁块系列<br>Transmission rod & lock block series                  | 55 |
| 门锁&框面板&锁芯系列<br>Door lock & frame panel & lock cylinder series     | 60 |
| 转角器&翻转支撑&倾转锁块系列<br>Corner & Flip Support & Tilt Lock Block Series | 65 |
| 纱窗系列<br>Screen window series                                      | 67 |
| 其他系列<br>Other series                                              | 69 |

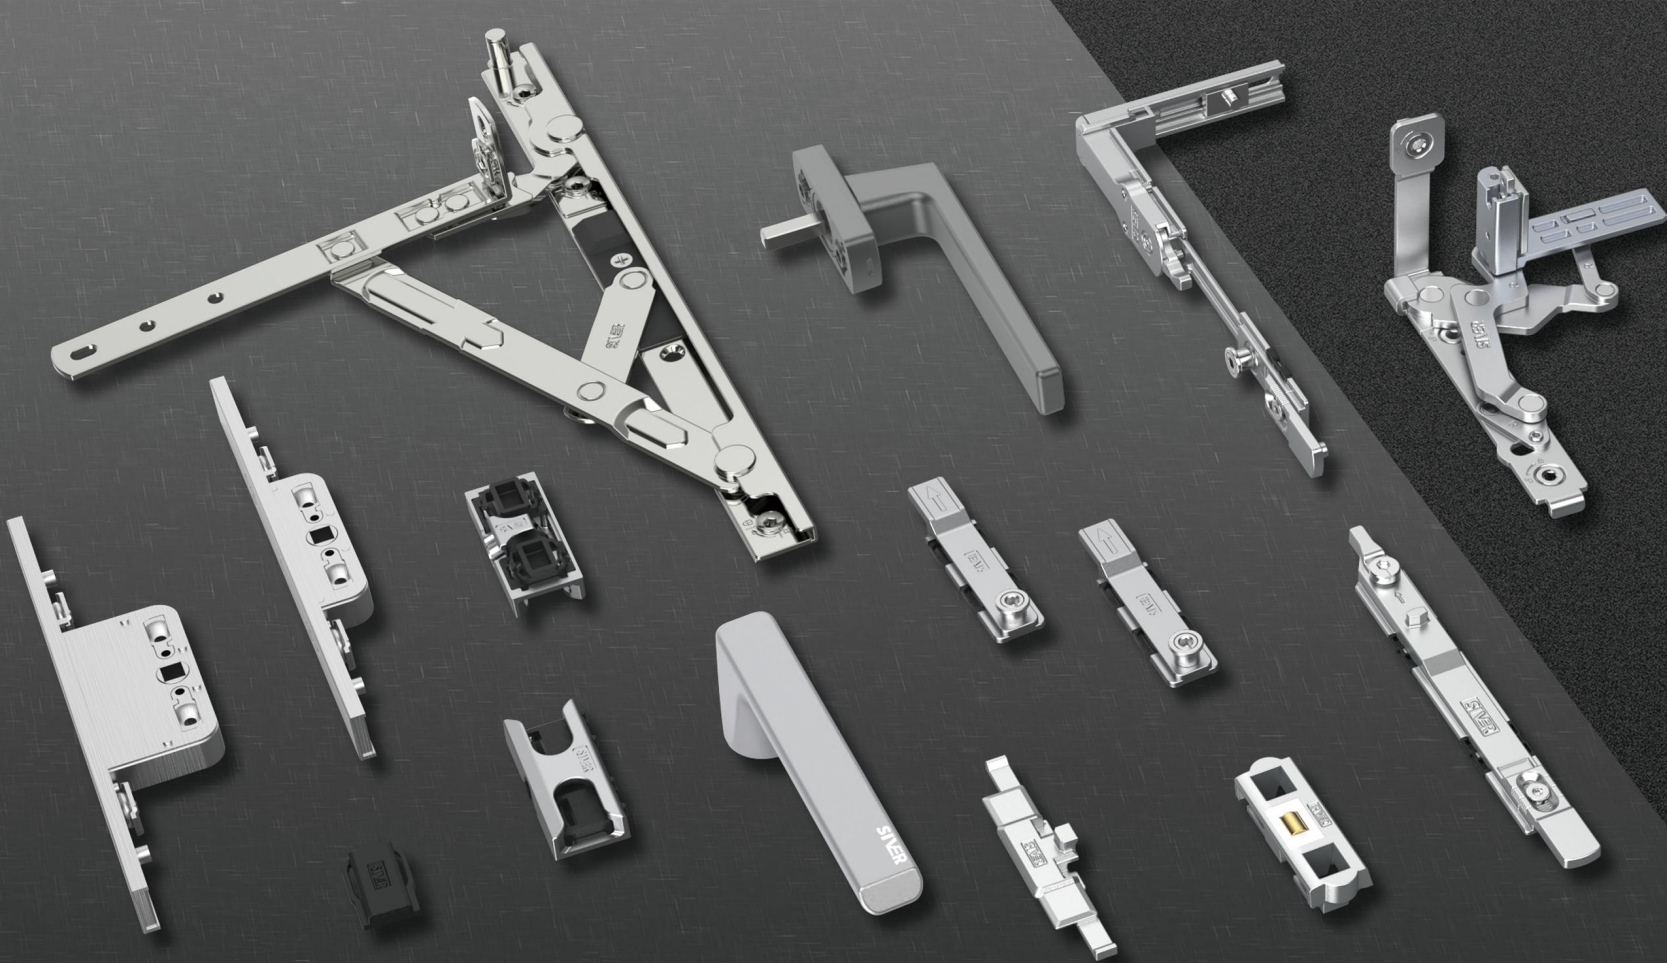

Standard C notch schematic  
标准C槽口示意图

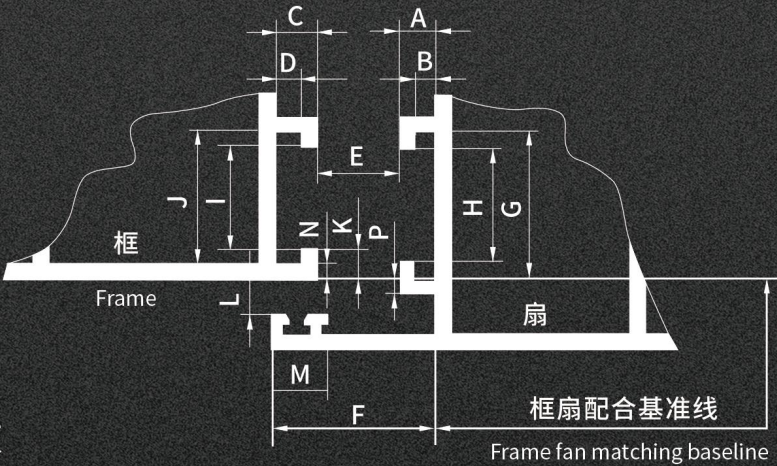

尺寸参数  
Size parameter

| A   | B | C | D | E    | F  | G                                  | H                                  | I                                  | J                                  | K | L | M   | N | P |
|-----|---|---|---|------|----|------------------------------------|------------------------------------|------------------------------------|------------------------------------|---|---|-----|---|---|
| 4.5 | 3 | 5 | 3 | 11.5 | 22 | 20 <sup>+0.3</sup> <sub>-0.1</sub> | 15 <sup>+0.3</sup> <sub>-0.1</sub> | 14 <sup>+0.3</sup> <sub>-0.1</sub> | 18 <sup>+0.3</sup> <sub>-0.1</sub> | 4 | 5 | 7.5 | 2 | 2 |



SIVER Standard系列 95°内平开下悬窗五金系统

SIVER Standard series 95 ° inner casement lower hanging window hardware system



SIVER Standard系列 95°内平开下悬窗五金系统

Standard series 95 ° inner casement lower hanging window hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                   | 型号/Code     | 数量/QTY | 备注/Mark                         |
|--------|---------------------------|-------------|--------|---------------------------------|
| 1      | 执手<br>Handle              | XZS0102     | 1      |                                 |
| 2      | 传动器<br>Actuator           | XCDQN00112A | 1      | 中心距12mm<br>Center distance 12mm |
| 3      | 隐形拉杆<br>Invisible tie rod | XYLG001R    | 1      | 分左右<br>left & right             |
| 4      | 隐形合页<br>Invisible Hinge   | XNYHY001R   | 1      | 分左右<br>left & right             |
| 5      | 转角器<br>Corner             | XZJQ001     | 1      |                                 |
| 6      | 锁块<br>Lock block          | XSK001      | 1      |                                 |
| 7      | 翻转支撑<br>Flip support      | XFZZC001    | 1      |                                 |
| 8      | 倾转锁块<br>Tilt lock block   | XQZSK001    | 1      |                                 |
| 9      | 垫块<br>Spacer              | XDK001      | 1      |                                 |
| 10     | 提升块<br>Lift block         | XTSK001     | 1      |                                 |

可选配件 Optional Accessories

|                      |                           |           |   |                     |
|----------------------|---------------------------|-----------|---|---------------------|
| ● 拨叉套装/Fork set      |                           |           |   |                     |
| 11                   | 执手<br>Handle              | XZSB0603  | 1 |                     |
| 12                   | 主传动杆<br>Main drive rod    | XZCDG002  | 1 |                     |
| ● 背锁套装/Back lock set |                           |           |   |                     |
| 13                   | 隐形拉杆<br>Invisible tie rod | XYLG001FR | 1 | 分左右<br>left & right |
| 14                   | 转角器<br>Corner             | XZJQ002   | 1 |                     |
| 15                   | 锁块<br>Lock block          | XSK001    | 2 |                     |
| 16                   | 传动杆<br>Transmission rod   | XCDG001   | 1 |                     |
| ● 无基座执手/No pedestal  |                           |           |   |                     |
| 17                   | 执手<br>Handle              | XZSW0403  | 1 | 选配<br>optional      |

配置说明/Configuration instructions:

- 1.合页最大承重80kg，适用窗扇宽490-850mm，适用窗扇高620-1800mm。  
Hinge maximum load 80kg,Applicable window sash width 495-850mm,Applicable window sash height 490-1800mm.
- 2.建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
- 3.五金件请定期维护。  
Please maintain the hardware regularly.



SIVER Standard系列 180°内平开下悬窗五金系统

SIVER Standard series 180 ° inner casement lower hanging window hardware system



SIVER Standard系列 180°内平开下悬窗五金系统

Standard series 180 ° inner casement lower hanging window hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                   | 型号/Code     | 数量/QTY | 备注/Mark                         |
|--------|---------------------------|-------------|--------|---------------------------------|
| 1      | 执手<br>Handle              | XZS0102     | 1      |                                 |
| 2      | 传动器<br>Actuator           | XCDQN00112A | 1      | 中心距12mm<br>Center distance 12mm |
| 3      | 隐形拉杆<br>Invisible tie rod | XYLG004R    | 1      | 分左右<br>left & right             |
| 4      | 隐形合页<br>Invisible Hinge   | XNYHY004R   | 1      | 分左右<br>left & right             |
| 5      | 转角器<br>Corner             | XZJQ001     | 1      |                                 |
| 6      | 锁块<br>Lock block          | XSK001      | 1      |                                 |
| 7      | 翻转支撑<br>Flip support      | XFZZC001    | 1      |                                 |
| 8      | 倾转锁块<br>Tilt lock block   | XQZSK001    | 1      |                                 |
| 9      | 垫块<br>Spacer              | XDK001      | 1      |                                 |
| 10     | 提升块<br>Lift block         | XTSK001     | 1      |                                 |

可选配件 Optional Accessories

|                                 |                 |          |   |                                      |
|---------------------------------|-----------------|----------|---|--------------------------------------|
| ● 免铣槽套装/Milling-free groove set |                 |          |   |                                      |
| 11                              | 传动器<br>Actuator | XCDQN002 | 1 |                                      |
| 12                              | 执手<br>Handle    | XZSW0402 | 1 | 轴外露29mm<br>Square steel exposed 29mm |

配置说明/Configuration instructions:

- 1.合页最大承重80kg，适用窗扇宽495-850mm，适用窗扇高620-1800mm。  
Hinge maximum load 80kg,Applicable window sash width 495-850mm,Applicable window sash height 490-1800mm.
- 2.建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
- 3.五金件请定期维护。  
Please maintain the hardware regularly.

SIVER Professional系列90°/180°内平开下悬窗五金系统  
SIVER Professional series 90°/180° inner casement lower hanging window hardware system



SIVER Professional 系列 90°/180° 内平开下悬窗五金系统  
Professional series 90°/180° inner casement lower hanging window hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                   | 型号/Code     | 数量/QTY | 备注/Mark                         |
|--------|---------------------------|-------------|--------|---------------------------------|
| 1      | 执手<br>Handle              | XZS0102     | 1      |                                 |
| 2      | 传动器<br>Actuator           | XCDQN00112A | 1      | 中心距12mm<br>Center distance 12mm |
| 3      | 隐形合页<br>Invisible Hinge   | XNYHY002R   | 1      | 分左右<br>Left & right             |
| 4      | 隐形拉杆<br>Invisible tie rod | XYLG002R    | 1      | 分左右<br>Left & right             |
| 5      | 锁块<br>Lock block          | XSKFD001    | 1      |                                 |
| 6      | 翻转支撑<br>Flip support      | XFZZC001    | 1      |                                 |
| 7      | 倾转锁块<br>Tilt lock block   | XQZSK001    | 1      |                                 |
| 8      | 垫块<br>Spacer              | XDK001      | 1      |                                 |
| 9      | 提升块<br>Lift block         | XTSK001     | 1      |                                 |
| 10     | 转角器<br>Corner             | XZJQFD001   | 1      |                                 |

可选配件 Optional Accessories

|                      |                           |           |   |                     |
|----------------------|---------------------------|-----------|---|---------------------|
| ● 背锁套装/Back lock set |                           |           |   |                     |
| 11                   | 隐形拉杆<br>Invisible tie rod | XYLG002FR | 1 | 分左右<br>Left & right |
| 12                   | 转角器<br>Corner             | XZJQFD002 | 1 |                     |
| 13                   | 锁块<br>Lock block          | XSKFD001  | 2 |                     |
| 14                   | 传动杆<br>Transmission rod   | XCDGFD001 | 1 |                     |

配置说明/Configuration instructions:

- 合页最大承重120kg，适用窗扇宽505-850mm，适用窗扇高660-1800mm。  
Hinge maximum load 120kg,Applicable window sash width 505-850mm,Applicable window sash height 660-1800mm.
- 建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
- 五金件请定期维护。  
Please maintain the hardware regularly.



SIVER Porto系列外平开窗纱一体五金系统

SIVER Porto series outer casement window screen integrated hardware system



SIVER Porto系列外平开窗纱一体五金系统

Porto series outer casement window screen integrated hardware system

配置清单 Accessories List

| 序号/No.                      | 名称/Name                         | 型号/Code     | 数量/QTY | 备注/Mark                                   |
|-----------------------------|---------------------------------|-------------|--------|-------------------------------------------|
| ● 外开玻扇/External opening fan |                                 |             |        |                                           |
| 1                           | 执手<br>Handle                    | XZS0105R    | 1      |                                           |
| 2                           | 传动器<br>Actuator                 | XCDQ00230   | 1      | 中心距30mm<br>Center distance 30mm           |
| 3                           | 滑撑<br>Slide support             | XHCP005R    | 1      | 分左右<br>Distinguish between left and right |
| 4                           | 滑撑<br>Slide support             | XHCP005L    | 1      | 分左右<br>Distinguish between left and right |
| 5                           | 传动杆<br>Transmission rod         | XCDGFD005   | 2      | 分左右<br>Distinguish between left and right |
| 6                           | 锁块<br>Lock block                | XSKFD005    | 2      |                                           |
| 7                           | 防脱器<br>Anti-drop device         | XFTQ001R    | 1      | 选配件<br>optional                           |
| 8                           | 提升块<br>Lift block               | XTSK001     | 1      | 选配件<br>optional                           |
| 9                           | 垫块<br>Spacer                    | XDK001      | 1      | 选配件<br>optional                           |
| 10                          | 中间锁块<br>Intermediate lock block | XZJS001     | 1      | 选配件<br>optional                           |
| ● 内开纱扇/Internal opening fan |                                 |             |        |                                           |
| 11                          | 执手<br>Handle                    | XZS0105     | 1      |                                           |
| 12                          | 传动器<br>Actuator                 | XCDQ00212.5 | 1      | 中心距12.5mm<br>Center distance 12.5mm       |
| 13                          | 隐形合页<br>Invisible Hinge         | XSYHY005R   | 1      | 分左右<br>Distinguish between left and right |
| 14                          | 隐形合页<br>Invisible Hinge         | XSYHY005L   | 1      | 分左右<br>Distinguish between left and right |
| 15                          | 传动杆<br>Transmission rod         | XCDGFD005   | 2      |                                           |
| 16                          | 锁块<br>Lock block                | XSKFD005    | 2      |                                           |
| 17                          | 磁吸块<br>Magnetic block           | XCCX001     | 2      | 选配件<br>optional                           |

配置说明/Configuration instructions:

- 1.本配置玻扇滑撑承重80Kg，纱扇合页承载15Kg;适用窗扇最宽800mm。  
This configuration glass fan sliding support bearing 80kg, yarn fan hinge bearing 15kg; the maximum width of the applicable window sash is 800mm.
- 2.建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
- 3.五金件请定期维护。  
Please maintain the hardware regularly.

SIVER Standard系列 外平开窗纱一体五金系统  
SIVER Standard series outer casement window screen integrated hardware system



SIVER Standard系列 外平开窗纱一体五金系统

Standard series outer casement window screen integrated hardware system

配置清单 Accessories List

| 序号/No.                      | 名称/Name                         | 型号/Code     | 数量/QTY | 备注/Mark                                   |
|-----------------------------|---------------------------------|-------------|--------|-------------------------------------------|
| ● 外开玻扇/External opening fan |                                 |             |        |                                           |
| 1                           | 执手<br>Handle                    | XZS0102     | 1      |                                           |
| 2                           | 传动器<br>Actuator                 | XCDQ00130   | 1      | 中心距30mm<br>Center distance 30mm           |
| 3                           | 滑撑<br>Slide support             | XHCP001R    | 1      | 分左右<br>Distinguish between left and right |
| 4                           | 滑撑<br>Slide support             | XHCP001L    | 1      | 分左右<br>Distinguish between left and right |
| 5                           | 传动杆<br>Transmission rod         | XCDGFD001   | 2      |                                           |
| 6                           | 锁块<br>Lock block                | XSKFD001    | 2      |                                           |
| 7                           | 防脱器<br>Anti-drop device         | XFTQ001R    | 1      | 选配件<br>optional                           |
| 8                           | 提升块<br>Lift block               | XTSK001     | 1      | 选配件<br>optional                           |
| 9                           | 垫块<br>Spacer                    | XDK001      | 1      | 选配件<br>optional                           |
| 10                          | 中间锁块<br>Intermediate lock block | XZJS001     | 1      | 选配件<br>optional                           |
| ● 内开纱扇/Internal opening fan |                                 |             |        |                                           |
| 11                          | 执手<br>Handle                    | XZS0102     | 1      |                                           |
| 12                          | 传动器<br>Actuator                 | XCDQ00112.5 | 1      | 中心距12.5mm<br>Center distance 12.5mm       |
| 13                          | 隐形合页<br>Invisible Hinge         | XSYHY001R   | 1      | 分左右<br>Distinguish between left and right |
| 14                          | 隐形合页<br>Invisible Hinge         | XSYHY001L   | 1      | 分左右<br>Distinguish between left and right |
| 15                          | 传动杆<br>Transmission rod         | XCDGFD001   | 2      |                                           |
| 16                          | 锁块<br>Lock block                | XSKFD001    | 2      |                                           |
| 17                          | 磁吸块<br>Magnetic block           | XCCX001     | 1      | 选配件<br>optional                           |

配置说明/Configuration instructions:

1. 本配置玻扇滑撑承重80Kg，纱扇合页承载20Kg；适用窗扇最宽800mm。  
This configuration glass fan sliding support bearing 80kg, yarn fan hinge bearing 20kg; the maximum width of the applicable window sash is 800mm.
2. 建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
3. 五金件请定期维护。  
Please maintain the hardware regularly.



SIVER 内平开窗纱一体五金系统（内玻外纱）

SIVER Integrated hardware system for inner casement window screen (inner glass & outer yarn)



SIVER 内平开窗纱一体五金系统（内玻外纱）

Integrated hardware system for inner casement window screen (inner glass & outer yarn)

配置清单 Accessories List

| 序号/No.                      | 名称/Name                         | 型号/Code     | 数量/QTY | 备注/Mark                                                   |
|-----------------------------|---------------------------------|-------------|--------|-----------------------------------------------------------|
| ● 内开玻扇/Internal opening fan |                                 |             |        |                                                           |
| 1                           | 执手<br>Handle                    | XZS0102     | 1      |                                                           |
| 2                           | 传动器<br>Actuator                 | XCDQ00112.5 | 1      | 中心距12.5mm<br>Center distance 12mm                         |
| 3                           | 隐形合页<br>Invisible Hinge         | XPYHY001R   | 1      | 分左右,90°开启<br>Distinguish between left and right,90 ° open |
| 4                           | 隐形合页<br>Invisible Hinge         | XPYHY001L   | 1      | 分左右,90°开启<br>Distinguish between left and right,90 ° open |
| 5                           | 传动杆<br>Transmission rod         | XCDGFD001   | 2      |                                                           |
| 6                           | 锁块<br>Lock block                | XSKFD001    | 2      |                                                           |
| 7                           | 提升块<br>Lift block               | XTSK001     | 1      | 选配件<br>optional                                           |
| 8                           | 垫块<br>Spacer                    | XDK001      | 1      | 选配件<br>optional                                           |
| 9                           | 限位器<br>Limiter                  | XFC00110    | 1      | 选配件<br>optional                                           |
| 10                          | 中间锁块<br>Intermediate lock block | XZJS001     | 1      | 选配件<br>optional                                           |
| ● 外开纱扇/External opening fan |                                 |             |        |                                                           |
| 11                          | 执手<br>Handle                    | XZS0102     | 1      |                                                           |
| 12                          | 传动器<br>Actuator                 | XCDQ00125   | 1      | 中心距25mm<br>Center distance 25mm                           |
| 13                          | 隐形合页<br>Invisible Hinge         | XSYHY004R   | 1      | 分左右<br>Distinguish between left and right                 |
| 14                          | 隐形合页<br>Invisible Hinge         | XSYHY004L   | 1      | 分左右<br>Distinguish between left and right                 |
| 15                          | 传动杆<br>Transmission rod         | XCDGFD001   | 2      |                                                           |
| 16                          | 锁块<br>Lock block                | XSKFD001    | 2      |                                                           |
| 17                          | 磁吸块<br>Magnetic block           | XCCX001     | 1      | 选配件<br>optional                                           |


可选配件 Optional Accessories

|                                       |                |             |   |                                                       |
|---------------------------------------|----------------|-------------|---|-------------------------------------------------------|
| ● 玻窗配件套装/Glass window accessories set |                |             |   |                                                       |
| 18                                    | 隐形合页<br>handle | XPYHY002R/L | 1 | 180°开启<br>180 ° open                                  |
| 19                                    | 隐形合页<br>handle | XPYHY003R/L | 1 | 90°开启，三维可调<br>90 ° open, three-dimensional adjustable |
| 20                                    | 隐形合页<br>handle | XPYHY004R/L | 1 | 180°开启，二维可调<br>180 ° open, 2D adjustable              |

配置说明/Configuration instructions:

- 本配置合页最大承重80kg，适用窗扇最宽800mm。  
The maximum load-bearing of the hinge of this configuration is 80kg, the maximum width of the suitable window sash is 800mm.
- 建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
- 五金件请定期维护。  
Please maintain the hardware regularly.

SIVER 内平开窗纱一体五金系统（双内开）  
SIVER Double inner casement window screen integrated hardware system

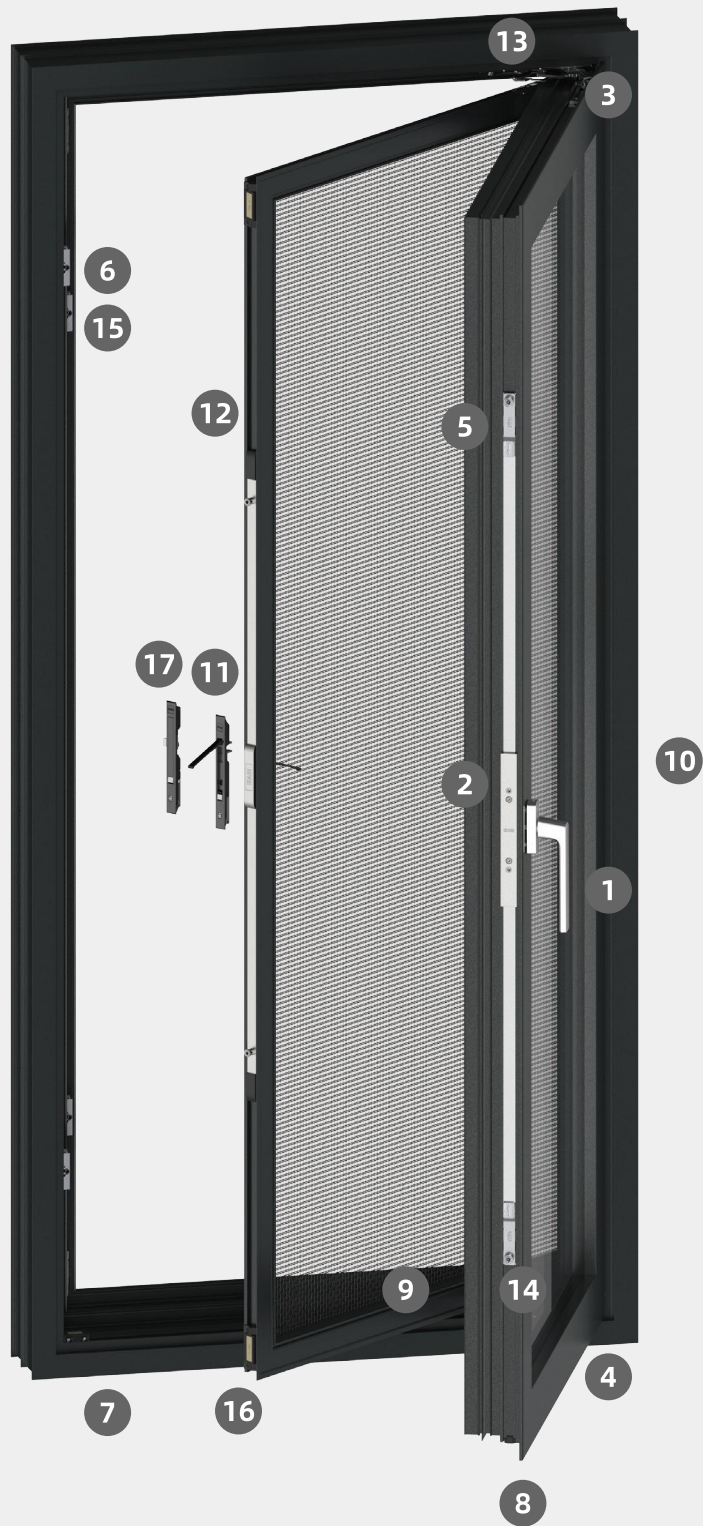

SIVER 内平开窗纱一体五金系统（双内开）  
Double inner casement window screen integrated hardware system

配置清单 Accessories List

| 序号/No.                           | 名称/Name                         | 型号/Code      | 数量/QTY | 备注/Mark                                   |
|----------------------------------|---------------------------------|--------------|--------|-------------------------------------------|
| ● 内开玻扇/Internal opening fan      |                                 |              |        |                                           |
| 1                                | 执手<br>Handle                    | XZS0102      | 1      |                                           |
| 2                                | 传动器<br>Actuator                 | XCDQ00112.5  | 1      | 中心距12.5mm<br>Center distance 12.5mm       |
| 3                                | 隐形合页<br>Invisible Hinge         | XPYHY001R    | 1      | 分左右<br>Distinguish between left and right |
| 4                                | 隐形合页<br>Invisible Hinge         | XPYHY001L    | 1      | 分左右<br>Distinguish between left and right |
| 5                                | 传动杆<br>Transmission rod         | XCDGFD001    | 2      |                                           |
| 6                                | 锁块<br>Lock block                | XCDGFD001    | 2      |                                           |
| 7                                | 提升块<br>Lift block               | XTSK002      | 1      | 选配件<br>optional                           |
| 8                                | 垫块<br>Spacer                    | XDK001       | 1      | 选配件<br>optional                           |
| 9                                | 限位器<br>Limiter                  | XFC00110     | 1      | 选配件<br>optional                           |
| 10                               | 中间锁块<br>Intermediate lock block | XZJS001      | 1      | 选配件<br>optional                           |
| ● 内开纱扇/Internal opening yarn fan |                                 |              |        |                                           |
| 11                               | 纱窗锁<br>Screen lock              | XSCS001      | 1      |                                           |
| 12                               | 主传动杆<br>Main drive rod          | XZCDGFD00308 | 1      |                                           |
| 13                               | 隐形合页<br>Invisible Hinge         | XSYHY004R    | 1      | 分左右<br>Distinguish between left and right |
| 14                               | 隐形合页<br>Invisible Hinge         | XSYHY004L    | 1      | 分左右<br>Distinguish between left and right |
| 15                               | 锁块<br>Lock block                | XSKFD001     | 2      |                                           |
| 16                               | 磁吸块<br>Magnetic block           | XCCX001      | 2      | 选配件<br>optional                           |

可选配件 Optional Accessories


|                                                 |                    |         |   |  |
|-------------------------------------------------|--------------------|---------|---|--|
| ● 纱扇单点锁块套装/Yarn fan single point lock block set |                    |         |   |  |
| 16                                              | 纱窗锁<br>Screen lock | XSCS002 | 1 |  |

配置说明/Configuration instructions:

- 本配置合页最大承重80kg;适用窗扇最宽800mm。  
The maximum load-bearing capacity of the hinge of this configuration is 80kg; the maximum width of the applicable window sash is 800mm.
- 建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
- 五金件请定期维护。  
Please maintain the hardware regularly.



SIVER 平开门五金系统  
SIVER Swing door hardware system

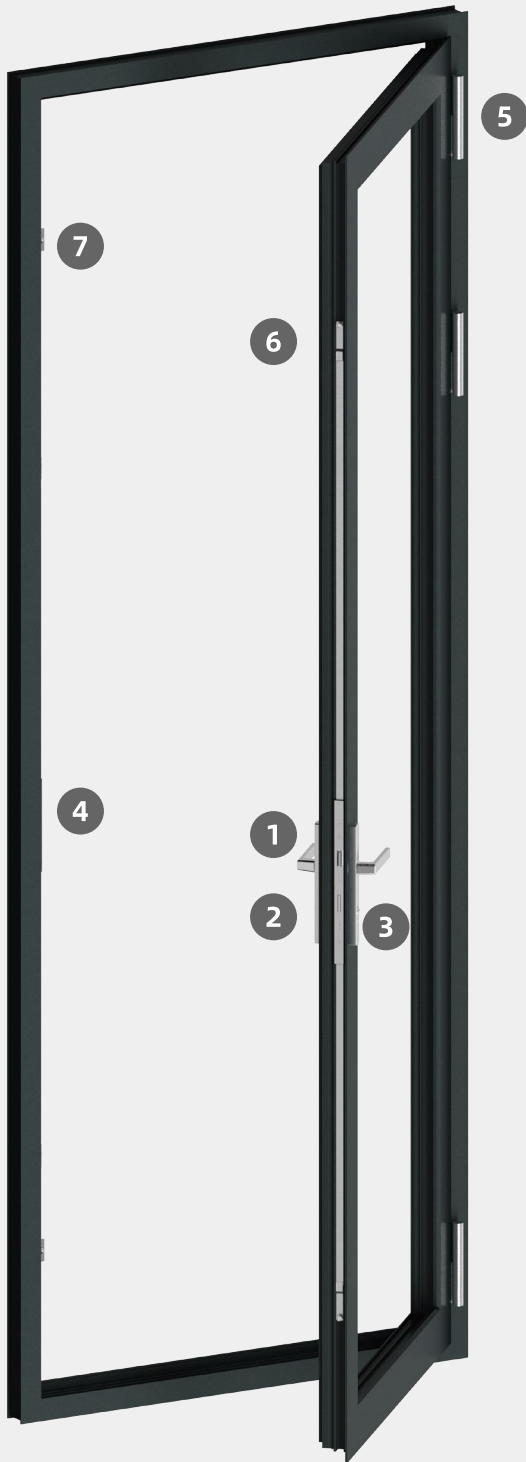

SIVER 平开门五金系统  
Swing door hardware system



配置清单 Accessories List

| 序号/No. | 名称/Name                 | 型号/Code   | 数量/QTY | 备注/Mark                         |
|--------|-------------------------|-----------|--------|---------------------------------|
| 1      | 门执手<br>Door handle      | XMZS0102  | 1      |                                 |
| 2      | 门锁<br>Door lock         | XDMS132   | 1      | 中心距32mm<br>Center distance 32mm |
| 3      | 锁芯<br>Lock cylinder     | XSX3247/G | 1      |                                 |
| 4      | 框面板<br>Frame panel      | XKMB002   | 1      |                                 |
| 5      | 门合页<br>Door hinge       | XMHY003R  | 3      | 分左右<br>left & right             |
| 6      | 传动杆<br>Transmission rod | XCDGFD001 | 2      |                                 |
| 7      | 锁块<br>Lock block        | XSKFD001  | 2      |                                 |

配置说明/Configuration instructions:

1. 本配置合页最大承重150kg;适用门扇最宽900mm, 适用门扇最高2300mm。  
The maximum load-bearing capacity of the hinge of this configuration is 150kg; the maximum width of the applicable door sash is 900mm, and the maximum width of the applicable door sash is 2300mm.
2. 建议窗型(宽/高)比为1:1.5。扇自重(玻璃、扇型材等辅件总重量)×1.4(安全系数)≤合页最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) × 1.4 (safety factor) ≤ maximum load-bearing of hinge.
3. 门执手方钢长度 / Door handle square steel length:
- ① 方钢长度L=扇型材厚度δ+(15-18)mm;  
Square steel length L = fan profile thickness δ + (15-18) mm;
- ② M5螺钉的长度L1=型材厚度δ+(15--18)mm。  
The length of the M5 screw L1 = the thickness of the profile δ + (15--18) mm.
- 门执手XMZS001/XMZSJ001方钢长度 / Door handle XMZS001/XMZSJ001 square steel length:
- ① 方钢长度L=扇型材厚度δ+(25--30)mm;  
Square steel length L = fan profile thickness δ + (25--30) mm;
- ② M5螺钉的长度L1=型材厚度δ+(15--18)mm。  
M5 screw length L1 = profile thickness δ + (15--18) mm.
- 门执手XMZS002/XMZSJ002方钢长度 / Door handle XMZS002/XMZSJ002 square steel length:
- ① 方钢长度L=扇型材厚度δ+(10-15)mm;  
Square steel length L = fan profile thickness δ + (10-15) mm;
- ② M5螺钉的长度L1=型材厚度δ+(15--18)。  
The length of the M5 screw L1 = the thickness of the profile δ + (15--18).
4. 五金件请定期维护  
Please maintain the hardware regularly.

SIVER 上悬窗五金系统

SIVER Upper hanging window hardware system



SIVER 上悬窗五金系统

Upper hanging window hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                 | 型号/Code   | 数量/QTY | 备注/Mark                                   |
|--------|-------------------------|-----------|--------|-------------------------------------------|
| 1      | 执手<br>Handle            | XZS0102   | 1      |                                           |
| 2      | 传动器<br>Actuator         | XCDQ00130 | 1      |                                           |
| 3      | 滑撑<br>Slide support     | XHCS00114 | 2      |                                           |
| 4      | 传动杆<br>Transmission rod | XCDGFD001 | 2      |                                           |
| 5      | 锁块<br>Lock block        | XSKFD001  | 2      |                                           |
| 6      | 风撑<br>Wind brace        | XFC00410R | 1      | 分左右<br>Distinguish between left and right |
| 7      | 风撑<br>Wind brace        | XFC00410L | 1      | 分左右<br>Distinguish between left and right |
| 8      | 防脱器<br>Anti-drop device | XFTQ001R  | 1      | 分左右<br>Distinguish between left and right |
| 9      | 提升块<br>Lift block       | XTSK002   | 2      |                                           |
| 10     | 垫块<br>Spacer            | XDK002    | 2      |                                           |

配置说明/Configuration instructions:

- 1.滑撑最大承重80kg。  
Hinge maximum load 80kg.
- 2.建议窗型（宽/高）比为1:1.5。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤滑撑最大承重。  
The recommended window type (width/height) ratio is 1:1.5.  
Fan weight (total weight of glass, fan profiles and other accessories) X1.4 (safety factor) ≤ maximum load-bearing of hinge.
- 3.五金件请定期维护，雨天或4级风以上的天气情况下不宜开启窗户，五级以上风力时，应该关闭开启窗。  
Please maintain the hardware regularly. The window should not be opened in rainy days or weather above level 4 wind. When the wind is above level 5, the window should be closed.



# Handle·方华系列



SIVER西菲尔

Upright handle series

## 执手 Handle

XZS0102

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm



## 执手 Handle

XZS0102L/R

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm



## 执手 | 大底座执手 Handle | Large base handle

XZS0102F

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm



## 执手 | 大底座执手 Handle | Large base handle

XZS0102L/RF

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)


技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm



# Handle·天穹系列

SIVER西菲尔

Sky handle series

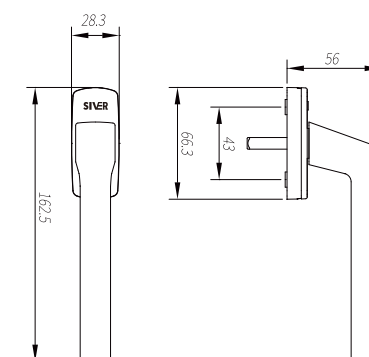

## 执手 Handle


XZS0201

适用系统: 平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

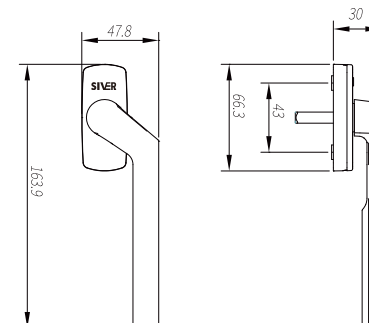

## 执手\*产品分左右/Distinguish L&R Handle


XZS0201L/R

适用系统: 平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

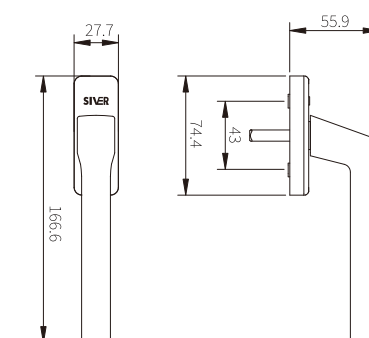

## 执手 | 大底座执手 Handle | Large base handle


XZS0201F

适用系统: 平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

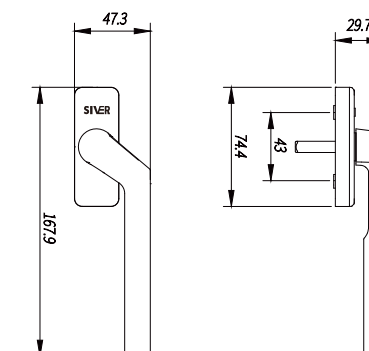

## 执手 | 大底座执手\*产品分左右/Distinguish L&R Handle | Large base handle

XZS0201L/RF

适用系统: 平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm  
螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm





Handle·流光系列



执手 | 窄底座执手

Handle | Narrow base handle

XZS0203K26

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

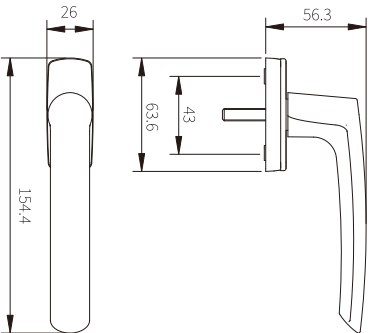

执手 | 窄底座执手<sup>\*</sup>产品分左右/Distinguish L&R

Handle | Narrow base handle

XZS0203K26L/R

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

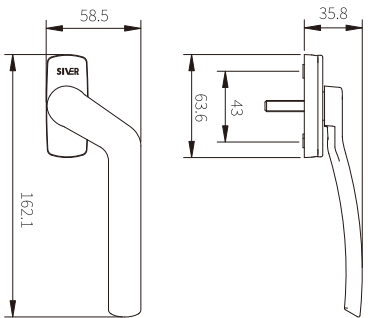





执手  
Handle

XZS0301

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

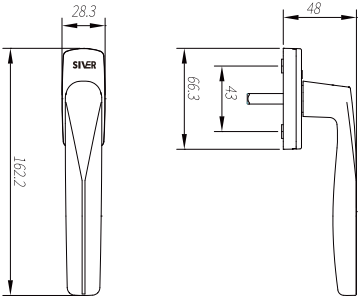

执手 | 双高执手

Handle | Double high handle

XZS0301G36

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

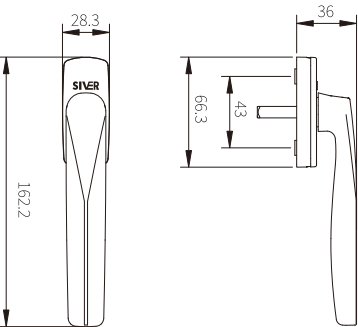

执手  
Handle

XZS0301L/R

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm



# Handle·飞驰系列





执手

Handle

XZSW0401



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy


表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：内开窗可选方钢外露长度25mm，螺钉选用M4\*20  
Parameters: Inward window with spindle exposed length 25mm, screw M4\*20mm

外开窗可选方钢外露长度45mm、50mm、55mm  
Outward window with spindle exposed length 45mm/50mm/55mm

螺钉选用M4\*方钢外露长度  
screw M4\*spindle exposed length



执手 | 双高执手

Handle | Double high handle

XZSW0401G36



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy


表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：内开窗可选方钢外露长度25mm，螺钉选用M4\*20  
Parameters: Inward window with spindle exposed length 25mm, screw M4\*20mm

外开窗可选方钢外露长度45mm、50mm、55mm  
Outward window with spindle exposed length 45mm/50mm/55mm

螺钉选用M4\*方钢外露长度  
screw M4\*spindle exposed length



执手 | 产品分左右/Distinguish L&R

Handle

XZSW0401L/R



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy


表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：内开窗可选方钢外露长度25mm，螺钉选用M4\*20  
Parameters: Inward window with spindle exposed length 25mm, screw M4\*20mm

外开窗可选方钢外露长度45mm、50mm、55mm  
Outward window with spindle exposed length 45mm/50mm/55mm

螺钉选用M4\*方钢外露长度  
screw M4\*spindle exposed length



执手

Handle

XZSW0402



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露29mm  
Parameters: Square steel exposed 29mm


螺钉M4\*14.5mm  
Screw M4\*14.5mm



执手

Handle

XZSW0403



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：内开窗可选方钢外露长度25mm，螺钉选用M4\*20  
Parameters: Inward window with spindle exposed length 25mm, screw M4\*20mm

外开窗可选方钢外露长度45mm、50mm、55mm  
Outward window with spindle exposed length 45mm/50mm/55mm


螺钉选用M4\*方钢外露长度  
screw M4\*spindle exposed length



执手 | 双高执手

Handle | Double high handle

XZSW0403G36



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：内开窗可选方钢外露长度25mm，螺钉选用M4\*20  
Parameters: Inward window with spindle exposed length 25mm, screw M4\*20mm

外开窗可选方钢外露长度45mm、50mm、55mm  
Outward window with spindle exposed length 45mm/50mm/55mm


螺钉选用M4\*方钢外露长度  
screw M4\*spindle exposed length



执手

Handle

XZSW0405



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：内开窗可选方钢外露长度25mm，螺钉选用M4\*20  
Parameters: Inward window with spindle exposed length 25mm, screw M4\*20mm

外开窗可选方钢外露长度45mm、50mm、55mm  
Outward window with spindle exposed length 45mm/50mm/55mm


螺钉选用M4\*方钢外露长度；可增配ST2.9自攻螺钉，增加紧固性  
screw M4\*spindle exposed length; ST2.9 self-tapping screws can be added to increase fastness



执手

Handle

XZSW0405L/R



适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层（曜石黑）  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆（骑士灰、帝王金、琥珀银）  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：内开窗可选方钢外露长度25mm，螺钉选用M4\*20  
Parameters: Inward window with spindle exposed length 25mm, screw M4\*20mm

外开窗可选方钢外露长度45mm、50mm、55mm  
Outward window with spindle exposed length 45mm/50mm/55mm

螺钉选用M4\*方钢外露长度；可增配ST2.9自攻螺钉，增加紧固性  
screw M4\*spindle exposed length; ST2.9 self-tapping screws can be added to increase fastness




# Handle·全盖系列



SIVER西菲尔

执手系列 | 全盖

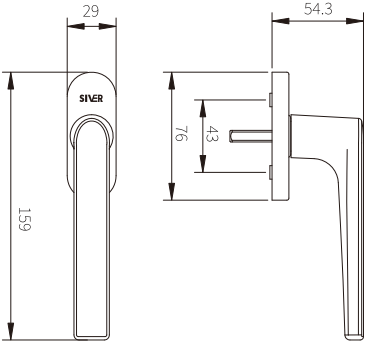

## 执手 Handle

XZS0501

适用系统: 平开窗、内平开下悬窗

Applicable system: Swing window / Turn-and-tilt window


材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

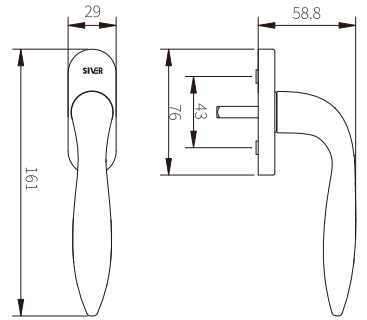

## 执手 Handle

XZS0502

适用系统: 平开窗、内平开下悬窗

Applicable system: Swing window / Turn-and-tilt window


材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

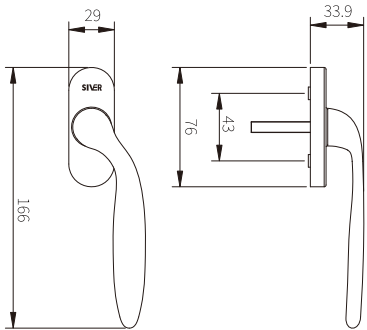

## 执手 Handle

XZS0502L/R

适用系统: 平开窗、内平开下悬窗

Applicable system: Swing window / Turn-and-tilt window


材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm

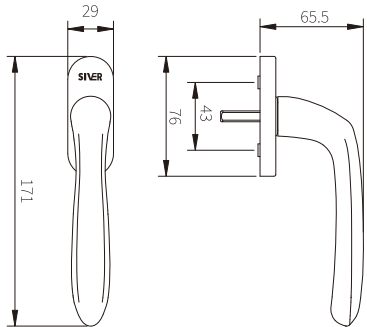

## 执手 Handle

XZS0503

适用系统: 平开窗、内平开下悬窗

Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5, 长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm





# Handle·拨叉系列



## 执手 Handle

XZSB0501

适用系统：内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：拨叉外露长度可选25、35、40mm  
Parameters: Fork length Exposed length can be selected from 25, 35, 40mm.



## 执手 \*产品分左右/Distinguish L&R Handle

XZSB0502

适用系统：内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：拨叉外露长度可选25、35、40mm  
Parameters: Fork length Exposed length can be selected from 25, 35, 40mm.



## 执手 Handle

XZSB0503

适用系统：内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：拨叉外露长度25、35、40mm  
Parameters: Fork length Exposed length can be selected from 25, 35, 40mm.



## 执手 \*产品分左右/Distinguish L&R Handle

XZSB0505

适用系统：内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：拨叉外露长度20-50mm  
Parameters: Fork length Exposed length 20-50mm





执手  
Handle


XZSB0603

适用系统: 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 拨叉外露长度20-50mm  
Parameters: TFork length Exposed length 20-50mm



执手  
Handle


XZSB0604

适用系统: 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 拨叉外露长度20-50mm  
Parameters: Fork length Exposed length 20-50mm



# Handle·童锁系列





# Handle·门执手系列



执手

Handle

XZSE0102

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm





执手

Handle

XZSE0201

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm





执手

Handle

XZSE0301

适用系统：平开窗、内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：铝合金  
Material: Aluminum alloy

表面处理：纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数：方钢外露长度25mm、45mm、50mm、55mm  
Parameters: Exposed length of square steel 25mm, 45mm, 50mm, 55mm

螺钉规格M5,长度=方钢外露长度+10mm  
Screw specification M5, length = square steel exposed length + 10mm









门执手  
Door Handle


XMZS001

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(25--30)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (25--30) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

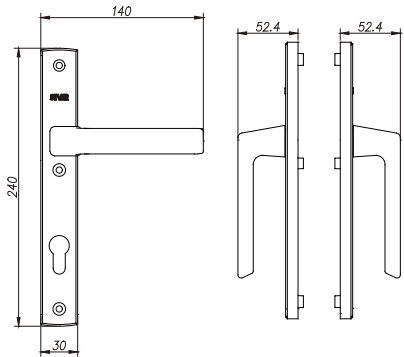

门执手 \*产品分左右/Distinguish L&R  
Door Handle


XMZSJ001

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(25--30)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (25--30) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

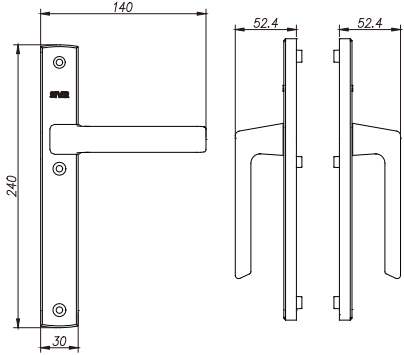

门执手  
Door Handle


XMZS002

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(10--15)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (10--15) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

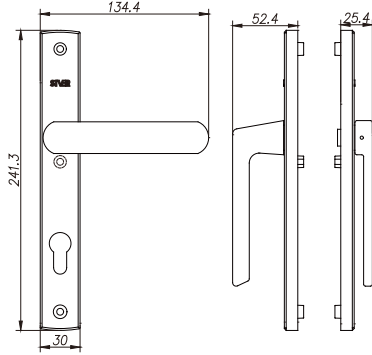

门执手  
Door Handle



XMZSJ002

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(10--15)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (10--15) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

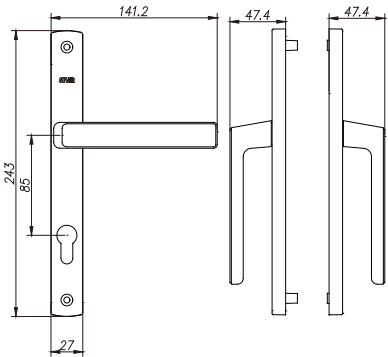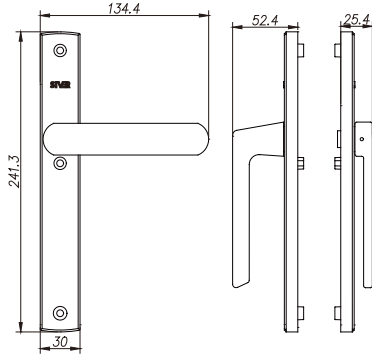

门执手  
Door Handle


XMZS0102

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

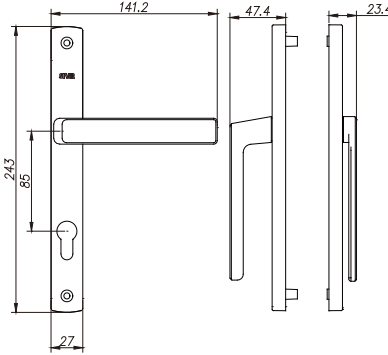

门执手  
Door Handle


XSMZS0102

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

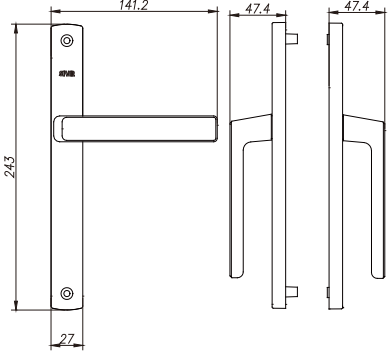

门执手  
Door Handle


XMZSJ0102

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

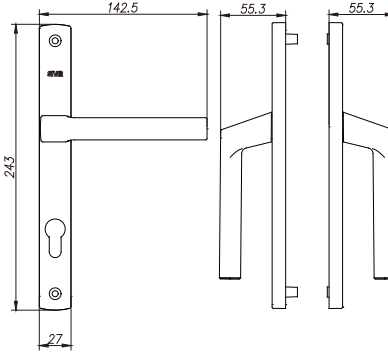

门执手  
Door Handle

XMZS0201

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.







门执手  
Door Handle


XSMZS0201

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

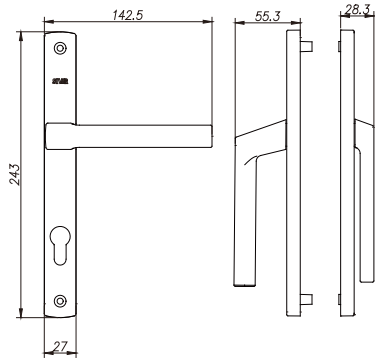

门执手  
Door Handle


XMZSJ0201

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

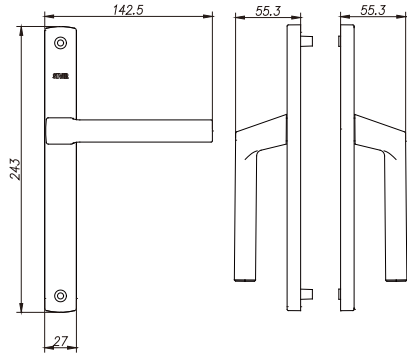

门执手  
Door Handle


XMZS0301

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

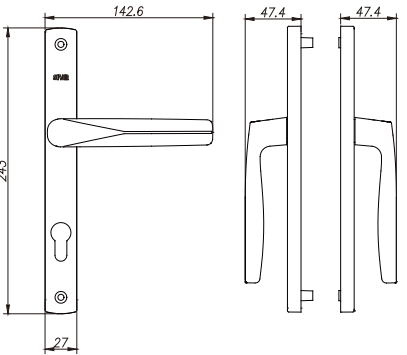

门执手  
Door Handle


XSMZS0301

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

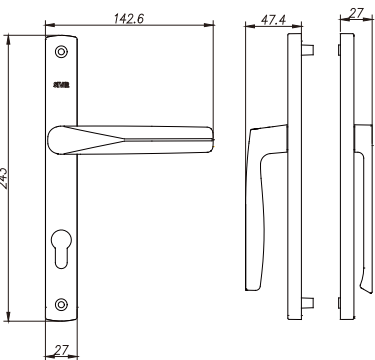

门执手  
Door Handle


XSMZSJ0301

适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy


表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)  
汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 方钢长度L=扇型材厚度 $\delta$ +(15--18)mm  
Parameters: Square steel length L = fan profile thickness  $\delta$  + (15--18) mm;  
M5螺钉的长度L1=型材厚度 $\delta$ +(15--18)mm.  
The length of the M5 screw L1 = the thickness of the profile  $\delta$  + (15--18) mm.

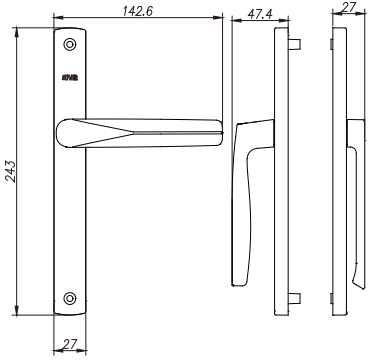

# 拉杆&合页&滑撑

Translation Tie Rod & Hinge & Slide Brace

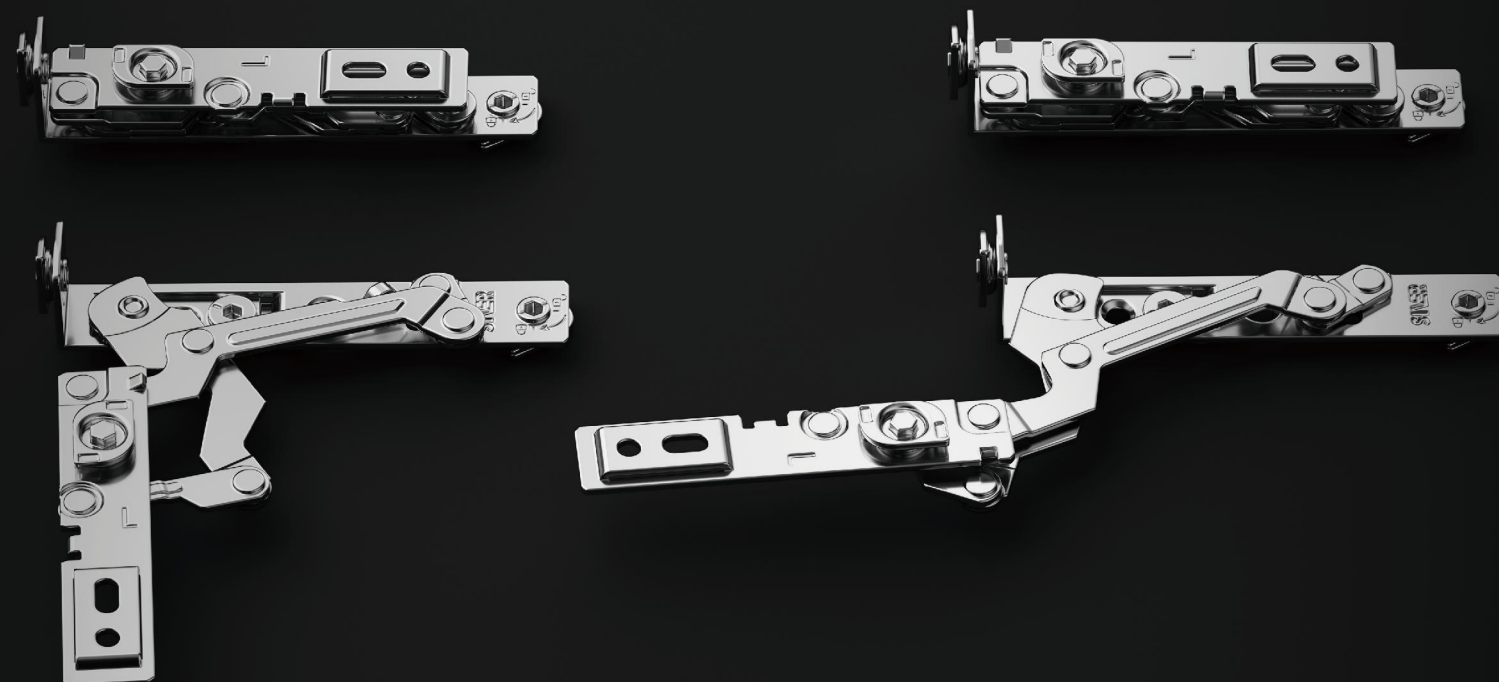


滑撑 承载力量的艺术

The Art of Sliding Braces Carrying Strength

## 隐形拉杆

Concealed connect rod XYLG001L/R



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window

材质: 不锈钢、锌合金  
Material: Stainless steel, zinc alloy

表面处理: 真空喷砂+纳米合金镀层600h  
Surface treatment: Vacuum sand blasting, Nano alloy coating 600h


技术参数: 适用窗槽宽490-850mm  
Parameters: Recommended window width 490-850mm

开启95°  
Opening angle 95°



## 隐形拉杆

Concealed connect rod XYLG001FL/R



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window

材质: 不锈钢、锌合金  
Material: Stainless steel, zinc alloy

表面处理: 真空喷砂+纳米合金镀层600h  
Surface treatment: Vacuum sand blasting, Nano alloy coating 600h

技术参数: 适用窗槽宽490-850mm  
Parameters: Recommended window width 490-850mm


开启95°  
Opening angle 95°

可连接背锁转角器  
Can connect with back corner device



## 隐形拉杆

Concealed connect rod XYLG002L/R



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window

材质: 不锈钢、锌合金  
Material: Stainless steel, zinc alloy

表面处理: 真空喷砂+纳米合金镀层600h  
Surface treatment: Vacuum sand blasting, Nano alloy coating 600h


技术参数: 适用窗槽宽505-850mm  
Parameters: Recommended window width 490-850mm

开启90/180°  
Opening angle 90°/180°



## 隐形拉杆

Concealed connect rod XYLG002FL/R



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window

材质: 不锈钢、锌合金  
Material: Stainless steel, zinc alloy

表面处理: 真空喷砂+纳米合金镀层600h  
Surface treatment: Vacuum sand blasting, Nano alloy coating 600h

技术参数: 适用窗槽宽505-850mm  
Parameters: Recommended window width 490-850mm

开启90/180°  
Opening angle 90°/180°

可连接背锁转角器  
Can connect with back corner device





隐形拉杆

Concealed connect rod

XYLG002350L/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金

Material : Stainless steel, zinc alloy

表面处理：真空喷砂+纳米合金镀层600h


Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：适用窗槽宽350-520mm

Parameters : Recommended window width 350-520mm

开启180°

Opening angle 180°

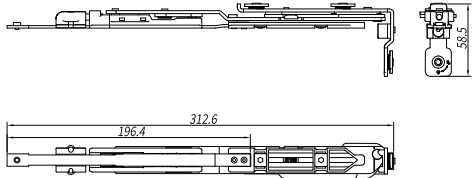

隐形拉杆

Concealed connect rod

XYLG002350FL/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金

Material : Stainless steel, zinc alloy

表面处理：真空喷砂+纳米合金镀层600h


Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：适用窗槽宽350-520mm

Parameters : Recommended window width 350-520mm

开启180°

Opening angle 180°

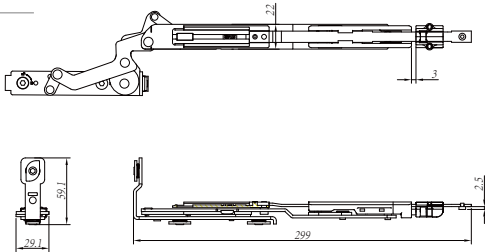

隐形拉杆

Concealed connect rod

XYLG004L/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金

Material : Stainless steel, zinc alloy

表面处理：真空喷砂+纳米合金镀层600h


Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：适用窗槽宽495-850mm

Parameters : Recommended window width 490-850mm

开启180°

Opening angle 180°

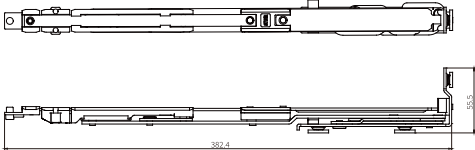

隐形拉杆

Concealed connect rod

XYLG006L/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金

Material : Stainless steel, zinc alloy

表面处理：真空喷砂+纳米合金镀层600h


Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：适用窗槽宽340-505mm

Parameters : Recommended window width 340-505 mm

开启90°/180°


Opening angle 90°/180°



隐形合页

Hidden hinge

XNYHY001L/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金

Material : Stainless steel, zinc alloy

表面处理：真空喷砂+纳米合金镀层600h

Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：开启95°, 承重80kg, 三维可调


Parameters : Opening angle 95°, load bearing 80kg, three-D adjustable



隐形合页

Hidden hinge

XNYHY002L/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金


Material : Stainless steel, zinc alloy

表面处理：真空喷砂+纳米合金镀层600h

Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：开启90°/180°, 承重120kg, 三维可调


Parameters : Opening angle 90°/180°, load bearing 120kg, three-D adjustable

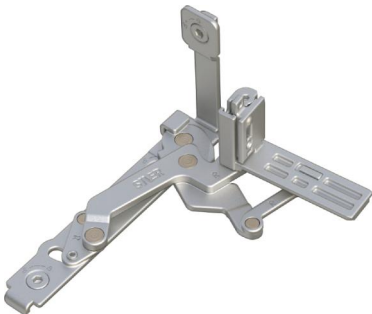

隐形合页

Hidden hinge

XNYHY004L/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金

Material : Stainless steel, zinc alloy

表面处理：真空喷砂+纳米合金镀层600h

Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：开启180°, 承重80kg, 三维可调


Parameters : Opening angle 180°, load bearing 80kg, three-D adjustable



隐形合页

Hidden hinge

XNYHY006L/R



适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：不锈钢、锌合金

Material : Stainless steel, zinc alloy


表面处理：真空喷砂+纳米合金镀层600h

Surface treatment : Vacuum sand blasting, Nano alloy coating 600h

技术参数：开启90°/180°, 承重60kg

Parameters : Opening angle 90°/180°, load bearing 60kg





隐形合页  
Hidden hinge



XPYHY001L/R

适用系统：内平开窗  
Applicable system: Inward swing window

材质：不锈钢  
Material: Stainless steel

表面处理：原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数：开启95°, 承重80kg, 前后左右可调节  
Parameters: Opening angle 95°, load bearing 80kg, adjustable front and back, left and right

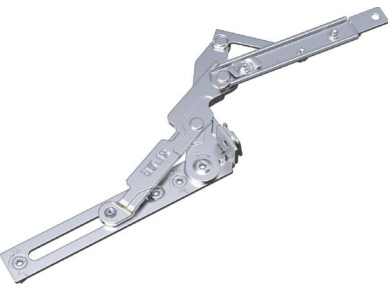

隐形合页  
Hidden hinge


XPYHY002AL/R

适用系统：内平开窗  
Applicable system: Inward swing window

材质：不锈钢、锌合金  
Material: Stainless steel, zinc alloy

表面处理：原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数：开启180°, 承重80kg, 左右可调节  
Parameters: Opening angle 180°, load bearing 80kg, adjustable left and right



隐形合页  
Hidden hinge


XPYHY003L/R

适用系统：内平开窗  
Applicable system: Inward swing window

材质：不锈钢  
Material: Stainless steel

表面处理：真空喷砂+纳米合金镀层600h  
Surface treatment: Vacuum sand blasting, Nano alloy coating 600h

技术参数：开启95°, 承重80kg, 三维可调  
Parameters: Opening angle 95°, load bearing 80kg, three-D adjustable



隐形合页  
Hidden hinge



XPYHY004L/R

适用系统：内平开窗  
Applicable system: Inward swing window

材质：不锈钢  
Material: Stainless steel

表面处理：原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数：开启180°, 承重80kg, 上下/左右可调节  
Parameters: Opening angle 180°, load bearing 80kg, adjustable up and down, left and right

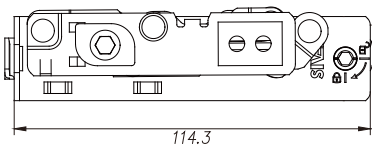

隐形合页  
Hidden hinge



XSYHY001KR/L

适用系统：平开纱窗  
Applicable system: Swing screen window

材质：不锈钢  
Material: Stainless steel

表面处理：原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数：开启165°, 承重20kg, K槽  
Parameters: Opening angle 165°, load bearing 20kg, Used in K-groove profile

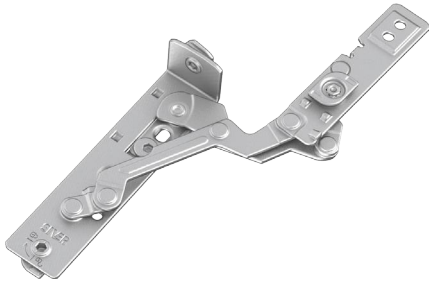

隐形合页  
Hidden hinge


XSYHY001R/L

适用系统：平开纱窗  
Applicable system: Swing screen window

材质：不锈钢  
Material: Stainless steel

表面处理：原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数：开启165°, 承重20kg  
Parameters: Opening angle 165°, load bearing 20kg



隐形合页  
Hidden hinge


XSYHY003L/R

适用系统：平开纱窗  
Applicable system: Swing screen window

材质：不锈钢  
Material: Stainless steel

表面处理：原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数：开启165°, 承重20kg  
Parameters: Opening angle 165°, load bearing 20kg



隐形合页  
Hidden hinge

XSYHY004L/R

适用系统：平开纱窗  
Applicable system: Swing screen window

材质：不锈钢  
Material: Stainless steel

表面处理：原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数：开启90°, 承重20kg  
Parameters: Opening angle 90°, load bearing 20kg







滑撑  
Friction stay


XHCP001L/R

适用系统: 外平开窗  
Applicable system: Outward swing window

材质: 不锈钢  
Material: Stainless steel

表面处理: 原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数: 85°开启, 承重80Kg, 反复启闭10万次  
Parameters: Opening angle 85°, load bearing 80kg, service life 100,000 times

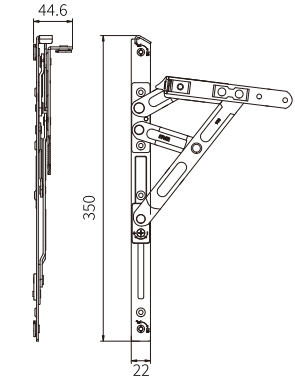

滑撑  
Friction stay


XHCP001KL/R

适用系统: 外平开窗  
Applicable system: Outward swing window

材质: 不锈钢  
Material: Stainless steel

表面处理: 原色, 可升级为真空喷砂+磁力研磨  
Surface treatment: Natural color, optional vacuum sand blasting + magnetic abrasive finishing

技术参数: 85°开启, 承重80Kg, 反复启闭10万次  
Parameters: Opening angle 85°, load bearing 80kg, service life 100,000 times

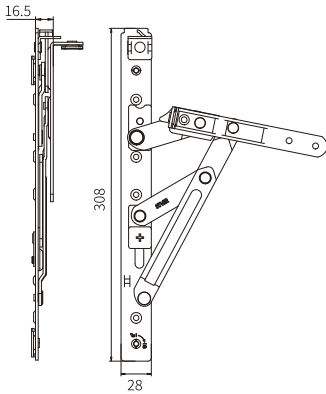

滑撑  
Friction stay


XHCP005

适用系统: 外平开窗  
Applicable system: Outward swing window

材质: 不锈钢  
Material: Stainless steel

表面处理: 原色  
Surface treatment: Natural color

技术参数: 承重60Kg, 反复启闭10万次  
Parameters: Load bearing 60kg, service life 100,000 times

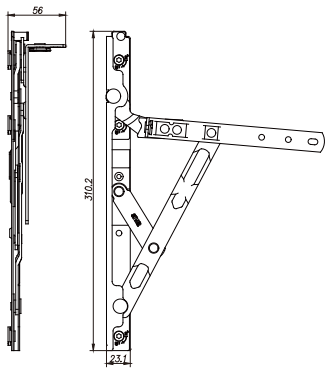

滑撑  
Friction stay


XHCS00114L/R

适用系统: 外上悬窗  
Applicable system: Upper hanging window

材质: 不锈钢  
Material: Stainless steel

表面处理: 磁力研磨  
Surface treatment: Magnetic abrasive finishing

技术参数: 14寸, 承重65kg, 不分左右  
Parameters: 14 inches, load-bearing 65kg, regardless of left and right

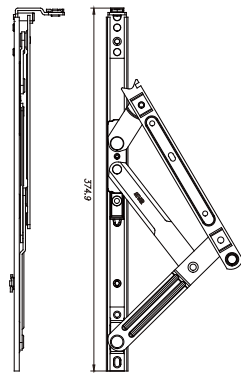

门合页  
Door hinge

XMHY001


适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 承重80Kg  
Parameters: Load bearing 80kg



门合页  
Door hinge

XMHY003


适用系统: 平开门  
Applicable system: Casement door

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层(曜石黑)  
Surface treatment: Nano non-toxic coating (obsidian black)

汽车级四重烤漆(骑士灰、帝王金、琥珀银)  
Automotive Grade Quadruple Paint (Knight Grey, Emperor Gold, Amber Silver)

技术参数: 承重150Kg  
Parameters: Load bearing 150kg





# 传动器系列

transmission series



纯不锈钢 诠释工业卓越品质

Pure stainless steel interprets excellent industrial quality

SIVER西菲尔


传动器



## 传动器 Transmitter

XCDQ001

适用系统: 平开窗  
Applicable system: Swing window  
材质: 不锈钢  
Material: Stainless steel  
表面处理: 真空喷砂  
Surface treatment: Vacuum sand blasting  
技术参数: 参考右侧表格进行选配  
Parameters: Refer to the right configuration

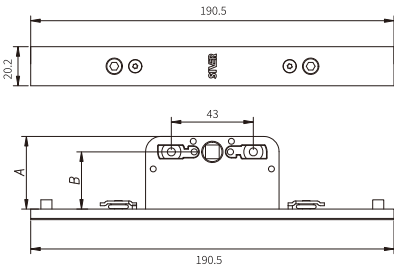


|   | 代号          | 腔体高度A | 中心距B |
|---|-------------|-------|------|
| 1 | XCDQ00110   | 16.7  | 10   |
| 2 | XCDQ00112.5 | 18.4  | 12.5 |
| 3 | XCDQ00125   | 23.3  | 25   |
| 4 | XCDQ00130   | 25.8  | 30   |



## 传动器 Transmitter

XCDQN002


适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 锌合金  
Material: Zinc alloy  
表面处理: 电镀锌镍  
Surface treatment: Electroplating zinc and nickel

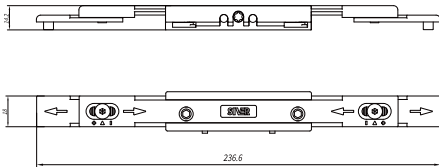

## 传动器 Transmitter

XCDQN00112


适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 不锈钢  
Material: Stainless steel  
表面处理: 拉丝  
Surface treatment: Hairline finish  
技术参数: 中心距12  
Parameters: Refer to the below configuration

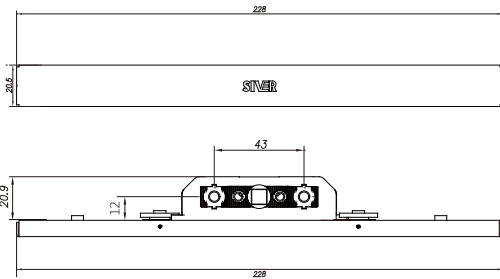

## 传动器 Transmitter

XCDQN00315

适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 锌合金  
Material: Zinc alloy  
表面处理: 电泳黑  
Surface treatment: Electrophoresis black  
技术参数: 中心距15  
Parameters: Refer to the below configuration

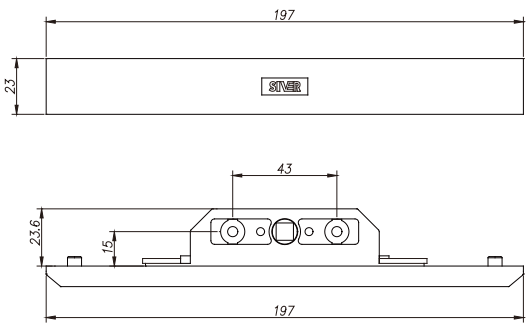



# 传动杆&锁块

Transmission rod & lock block




锁块 坚不可摧的守护者

The indestructible guardian of the lock block

SIVER西菲尔

传动杆、锁块



## 主传动杆

Transmission rod

XZCDG001


适用系统: 内平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 锌合金  
Material: Zinc alloy

表面处理: 纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数: 销轴外露长度可选10,15,20,25,30,35mm  
Parameters: Pin exposed length 10/15/20/25/30/35mm

配合拨叉执手  
Matched with fork handle



## 主传动杆

Transmission rod


XZCDG002

适用系统: 内平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 锌合金  
Material: Zinc alloy

表面处理: 纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数: 配合拨叉执手  
Parameters: Matched with fork handle

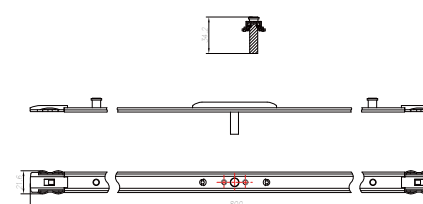

## 主传动杆

Transmission rod

XZCDG00308


适用系统: 内平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 铝合金  
Material: Aluminum alloy

表面处理: 纳米无毒涂层-曜石黑  
Surface treatment: Nano non-toxic coating--obsidian black

技术参数: 参考左侧表格进行选配  
Parameters: Refer to the left configuration

|                        |     |     |     |      |      |    |       |
|------------------------|-----|-----|-----|------|------|----|-------|
| T钉外露长度:                | 20  | 22  | 25  | 28   | 30   | 32 | 35    |
| T nail exposed length: |     |     |     |      |      |    | 单位 mm |
| T钉外露长度:                | 400 | 600 | 800 | 1000 | 1200 |    |       |
| Length of rod:         |     |     |     |      |      |    | 单位 mm |



## 传动杆

Transmission rod

XCDG001

适用系统: 内平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 锌合金  
Material: Zinc alloy

表面处理: 纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数: 滚动圆柱体锁点  
Parameters: Roll round head lock point





传动杆

Transmission rod


XCDGFD001

适用系统：内平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：滚动防撬锁点  
Parameters: Roll anti-theft lock point



传动杆

Transmission rod


XCDG002

适用系统：内平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：滚动圆柱体锁点  
Parameters: Roll round head lock point



传动杆

Transmission rod


XCDGFD002

适用系统：内平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：滚动防撬锁点  
Parameters: Roll anti-theft lock point



传动杆

Transmission rod



XCDG004

适用系统：内平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：滚动圆柱体锁点  
Parameters: Roll round head lock point



传动杆

Transmission rod


XCDGFD004

适用系统：内平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：滚动防撬锁点  
Parameters: Roll anti-theft lock point



传动杆

Transmission rod



XCDGFD005

适用系统：内平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：不锈钢304  
Material: Stainless steel 304

表面处理：真空喷砂+磁力研磨  
Surface treatment: Vacuum sandblasting + magnetic grinding

技术参数：滚动防撬锁点  
Parameters: Roll anti-theft lock point



锁块

Lock block


XSK001

适用系统：平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：配圆柱头锁点  
Parameters: Matched with round head lock point



锁块

Lock block

XSKFD001

适用系统：平开窗，内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window


材质：锌合金  
Material: Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：配防撬锁点  
Parameters: Matched with anti-theft lock point







### 锁块

Lock block

XSKFD001K

适用系统：平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy


表面处理：纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H

技术参数：K槽, 配圆柱头锁点  
Parameters: Used in K groove profile, matched with round head lock point



# 门锁&框面板&锁芯

Door lock & frame panel & cylinder



### 锁块

Lock block

XSKFD005

适用系统：平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质：不锈钢304  
Material: Stainless steel 304

表面处理：真空喷砂+磁力研磨  
Surface treatment: Vacuum sandblasting + magnetic grinding

技术参数：配防撬锁点  
Parameters: Matched with anti-theft lock point







门锁

Door lock


XMS027

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：中心距27mm，单点锁闭  
Parameters: Backset 27mm, single lock point

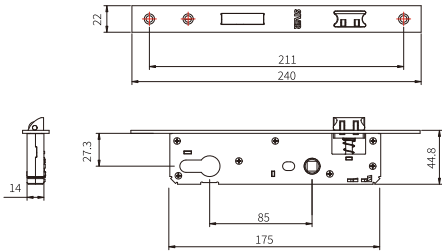

门锁

Door lock


XMS032

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：中心距32mm，单点锁闭  
Parameters: Backset 32mm, single lock point

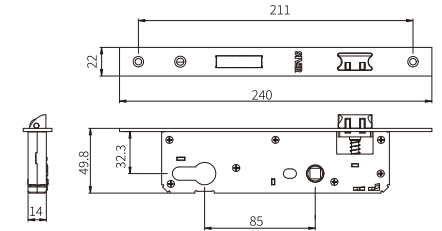

门锁

Door lock


XDMS127

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：中心距27mm，多点锁闭  
Parameters: Backset 27mm, multi-lock point

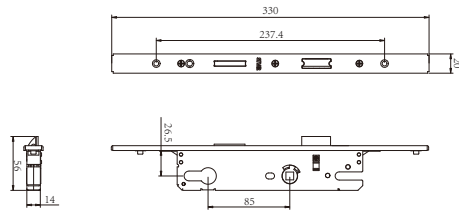

门锁

Door lock


XDMS132

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：中心距32mm，多点锁闭  
Parameters: Backset 32mm, multi-lock point

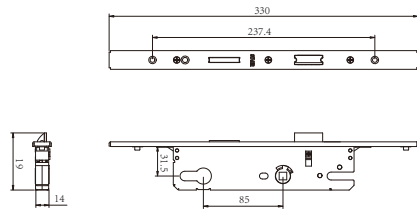

门锁

Door lock


XDMS137

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：中心距37mm，多点锁闭  
Parameters: Backset 37mm, multi-lock point

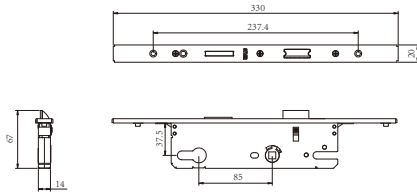

门锁

Door lock


XDMS142

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：中心距42mm，多点锁闭  
Parameters: Backset 42mm, multi-lock point

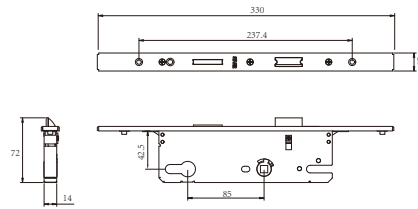

框面板

Cover plate


XKMB001

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：配套门锁XMS0系列和XDMS0系列  
Parameters: Matched with door lock XMS0 and XDMS0 series



框面板

Cover plate


XKMB002

适用系统：平开门  
Applicable system: Casement door

材质：不锈钢  
Material: Stainless steel

表面处理：不锈钢拉丝  
Surface treatment: SS Hairline finish

技术参数：配套门锁XDMS1系列  
Parameters: Matched with door lock XDMS1 series





锁芯  
Door Cylinder


XSXAB/G



表面处理: 镍拉丝  
Surface treatment: Brushed nickel

技术参数: A为室外钥匙端到中心的尺寸  
Parameters: A is the length from outside to center


B为室内手轮端到中心的尺寸  
B is the length from inside to center

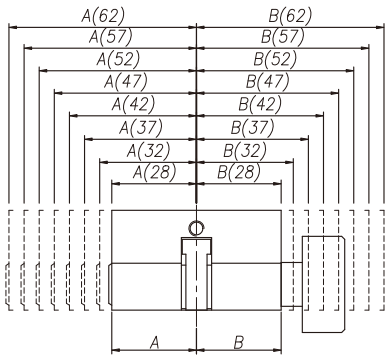

# 转角器&翻转支撑&倾转锁块

Corner & Flip Support & Preventer





转角器  
Corner device


XZJQ001

适用系统：内平开下悬窗  
Applicable system：Turn-and-tilt window

材 质：锌合金  
Material：Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment：Nano alloy coating 600H

技术参数：滚动圆柱头锁点，带下料调节  
Parameters：Roll round head lock point, with cutting error adjustment function



转角器  
Corner device


XZJQFD001

适用系统：内平开下悬窗  
Applicable system：Turn-and-tilt window

材 质：锌合金  
Material：Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment：Nano alloy coating 600H

技术参数：滚动防撬锁点，带下料调节  
Parameters：Roll ranti-theft lock point , with cutting error adjustment function



转角器  
Corner device



XZJQ002

适用系统：内平开下悬窗  
Applicable system：Turn-and-tilt window

材 质：锌合金  
Material：Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment：Nano alloy coating 600H

技术参数：滚动圆柱头锁点，背锁转角器  
Parameters：Roll round head lock point, it is back corner device



转角器  
Corner device



XZJQ003

适用系统：内平开下悬窗  
Applicable system：Turn-and-tilt window

材 质：锌合金  
Material：Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment：Nano alloy coating 600H

技术参数：滚动圆柱头锁点，无下料调节  
Parameters：Roll round head lock point, without cutting error adjustment function

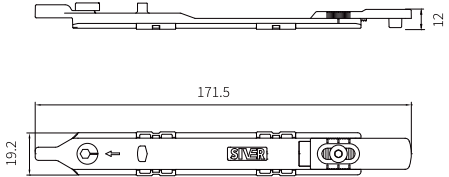

翻转支撑  
Overturn supporter


XFZZC001

适用系统：内平开下悬窗  
Applicable system：Turn-and-tilt window

材 质：锌合金  
Material：Zinc alloy

表面处理：纳米合金镀层600H  
Surface treatment：Nano alloy coating 600H

技术参数：带下料调节  
Parameters：With cutting error adjustment function

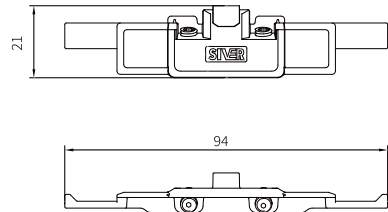

倾转锁块  
Preventer

XQZSK001

适用系统：内平开窗，内平开下悬窗  
Applicable system：Swing window / Turn-and-tilt window

材 质：锌合金  
Material：Zinc alloy


表面处理：纳米合金镀层600H  
Surface treatment：Nano alloy coating 600H





隐形守护者，阻挡蚊虫侵扰

Invisible Guardian to block mosquito infestations

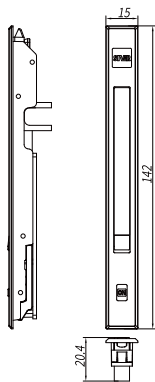


纱窗锁

Screen lock

XSCS001

适用系统：内平开窗纱一体五金系统(双内开)  
Applicable system: Inner casement window screen integrated hardware system (double inner opening)  
材质：锌合金  
Material: Ziny alloy  
表面处理：纳米无毒涂层-曜石黑、琥珀银  
Surface treatment: Nano non-toxic coating -- obsidian black, amber silver  
技术参数：滚动式密码锁、外露拨叉长度18mm  
Parameters: Rolling combination lock, exposed fork length 18mm

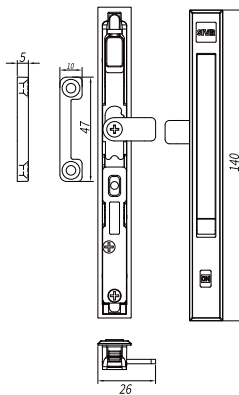


纱窗锁

Screen lock

XSCS002

适用系统：内平开窗纱一体五金系统(双内开)  
Applicable system: Inner casement window screen integrated hardware system (double inner opening)  
材质：锌合金  
Material: Ziny alloy  
表面处理：纳米无毒涂层-曜石黑、琥珀银  
Surface treatment: Nano non-toxic coating -- obsidian black, amber silver  
技术参数：滚动式密码锁、外露拨叉长度25mm  
Parameters: Rolling combination lock, exposed fork length 25mm

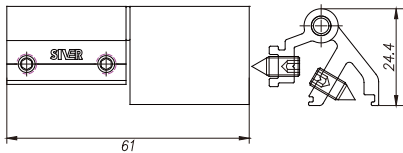


纱窗合页

Screen hinge

XSHY023

适用系统：内平开窗纱一体五金系统(双内开)  
Applicable system: Inner casement window screen integrated hardware system (double inner opening)  
材质：铝合金  
Material: Aluminum alloy  
表面处理：纳米无毒涂层-曜石黑  
Surface treatment: Nano non-toxic coating -- obsidian black  
技术参数：支持非标型材定制, 承重15Kg  
Parameters: Support non-standard profile customization, bearing 15Kg

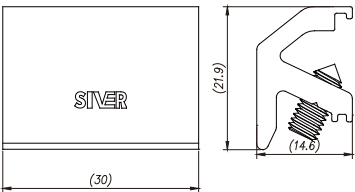

纱窗锁块

Lock block

XSHY014


适用系统：内平开窗纱一体五金系统(双内开)  
Applicable system: Inner casement window screen integrated hardware system (double inner opening)  
材质：铝合金  
Material: Aluminum alloy  
表面处理：纳米无毒涂层-曜石黑  
Surface treatment: Nano non-toxic coating -- obsidian black  
技术参数：支持非标型材定制  
Parameters: Support non-standard profile customization





# 其他系列


Other series

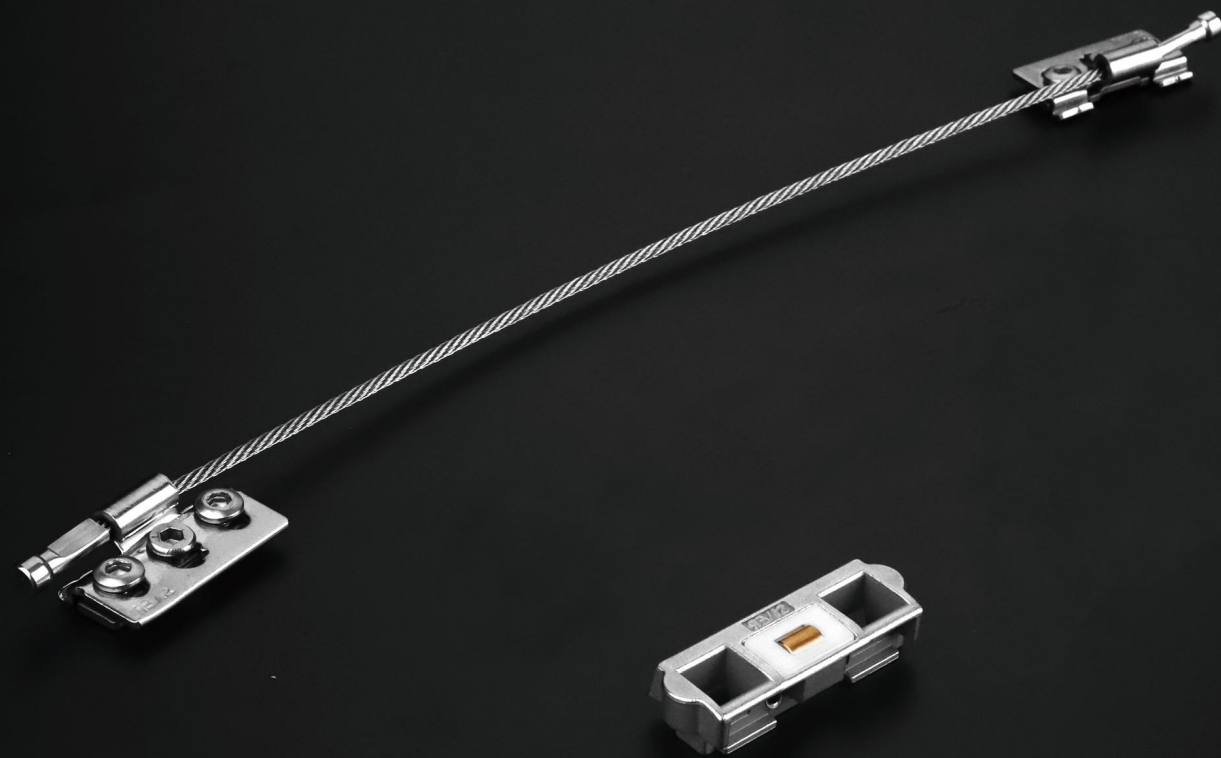

## 限位器

Limiter series

XFC00110



适用系统: 平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window

材质: 不锈钢 304  
Material: Stainless steel 304

表面处理: 振光  
Surface treatment: Vibrating finish


技术参数: 10寸  
Parameters: Size 10 inches



## 风撑

Limiter series

XFC00210R/L




适用系统: 上悬窗  
Applicable system: Upper hanging window

材质: 不锈钢 304  
Material: Stainless steel 304

表面处理: 磁力研磨  
Surface treatment: Magnetic polishing


技术参数: 10寸  
Parameters: Size 10 inches

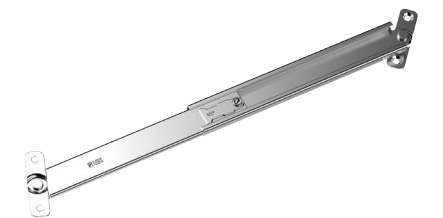

## 防脱器

Anti-fall device

XFTQ001L/R



适用系统: 外平开窗  
Applicable system: Outward swing window

材质: 不锈钢 304  
Material: Stainless steel 304

表面处理: 振光  
Surface treatment: Vibrating finish


技术参数: 欧标C槽  
Parameters: Used in Euro C-groove profile



## 防脱器

Anti-fall device

XFTQ001KL/R

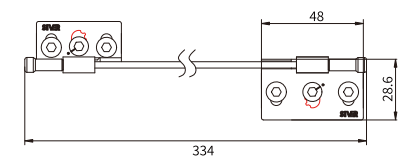

适用系统: 外平开窗  
Applicable system: Outward swing window

材质: 不锈钢 304  
Material: Stainless steel 304

表面处理: 振光  
Surface treatment: Vibrating finish

技术参数: K槽  
Parameters: Used in K-groove profile









提升块

Supporting block

XTSK001

适用系统: 平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window  
材质: 锌合金  
Material: Zinc alloy  
表面处理: 纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H  
技术参数: 欧标C槽  
Parameters: Used in Euro C-groove profile

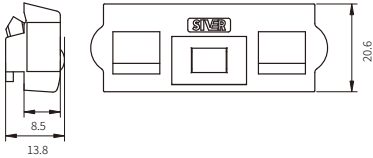

中间锁块

Intermediate lock block

XZJS001

适用系统: 平开窗  
Applicable system: Swing window  
材质: 锌合金+不锈钢  
Material: Zinc alloy + Stainless steel  
表面处理: 纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H  
技术参数: 欧标C槽  
Parameters: Used in Euro C-groove profile





提升块

Supporting block

XTSK002

适用系统: 平开窗, 内平开下悬窗  
Applicable system: Swing window / Turn-and-tilt window  
材质: 工程塑料  
Material: Engineering Plastics  
表面处理: 纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H  
技术参数: 欧标C槽  
Parameters: Used in Euro C-groove profile

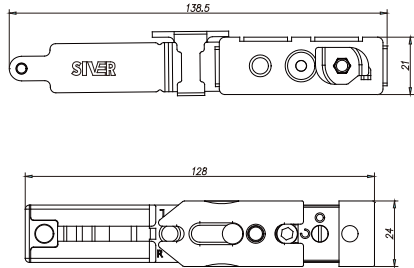

微通风器

Micro ventilator

XWT001

适用系统: 通用  
Applicable system: General  
材质: 不锈钢+POM  
Material: Stainless steel + POM  
表面处理: 磁力研磨  
Surface treatment: Magnetic polishing  
技术参数: 欧标C槽  
Parameters: Used in Euro C-groove profile





垫块

Cushion block

XDK001

材质: POM  
Material: POM

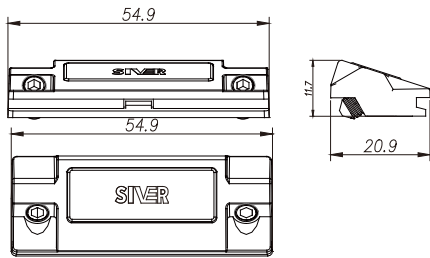


磁吸块

Magnetic block

XCCX001

适用系统: 纱窗  
Applicable system: Screen window  
材质: 塑料  
Material: Plastics  
技术参数: 欧标C槽  
Parameters: Used in Euro C-groove profile




垫块

Cushion block

XDK002

适用系统: 平开窗  
Applicable system: Swing window  
材质: 锌合金  
Material: Zinc alloy  
表面处理: 纳米合金镀层600H  
Surface treatment: Nano alloy coating 600H  
技术参数: 配圆柱头锁点  
Parameters: Matched with round head lock point



# CONTENTS 欧标U槽门窗五金目录

EUROPEAN STANDARD U SLOT DOORS AND WINDOWS HARDWARE CATALOG

## 五金系统 HARDWARE SYSTEM


|                                                                                                                      |    |
|----------------------------------------------------------------------------------------------------------------------|----|
| SIVER 4mm安装空间-内平开下悬窗五金系统<br>SIVER 4mm installation space - inner casement lower hanging window hardware system       | 69 |
| SIVER 框C扇U-隐形内平开下悬窗五金系统<br>SIVER Frame C fan U-invisible inner casement lower hanging window hardware system         | 71 |
| SIVER U-PVC 隐形内平开下悬窗五金系统<br>SIVER U-PVC invisible inner casement lower hanging window hardware system                | 73 |
| SIVER 实木/铝包木隐形内平开下悬窗五金系统<br>SIVER Solid wood/aluminum clad wood invisible inner casement lower hanging window U slot | 75 |

## 产品系列 HARDWARE ITEMS


|                                                                          |    |
|--------------------------------------------------------------------------|----|
| SIVER 欧标U槽五金单品<br>SIVER European standard U slot hardware single product | 77 |
|--------------------------------------------------------------------------|----|

Schematic diagram of several U-slots  
几种U槽槽口示意图


PVC型材尺寸 PVC Profile Size



要求扇和框的配合尺寸  
Required matching size of fan and frame




要求窗扇型材槽口的尺寸  
Required size of sash profile slot




要求窗框型材槽口的尺寸  
Require the size of the window frame profile slot


框C扇U型材尺寸 Frame C Fan U Profile Size



要求扇和框的配合尺寸  
Required matching size of fan and frame




要求窗扇型材槽口的尺寸  
Required size of sash profile slot




要求窗框型材槽口的尺寸  
Require the size of the window frame profile slot

实木型材尺寸 Solid Wood Profile Size




要求扇和框的配合尺寸  
Required matching size of fan and frame




要求窗扇型材槽口的尺寸  
Required size of sash profile slot

铝包木型材尺寸 Aluminum Clad Wood Profile Size




要求扇和框的配合尺寸  
Required matching size of fan and frame




要求窗扇型材槽口的尺寸  
Required size of sash profile slot

木包铝型材尺寸 Wooden Clad Aluminum Profile Size



要求扇和框的配合尺寸  
Required matching size of fan and frame




要求窗扇型材槽口的尺寸  
Required size of sash profile slot



SIVER 4mm安装空间-隐形内平开下悬五金系统

SIVER 4mm installation space - invisible inner casement lower suspension hardware system

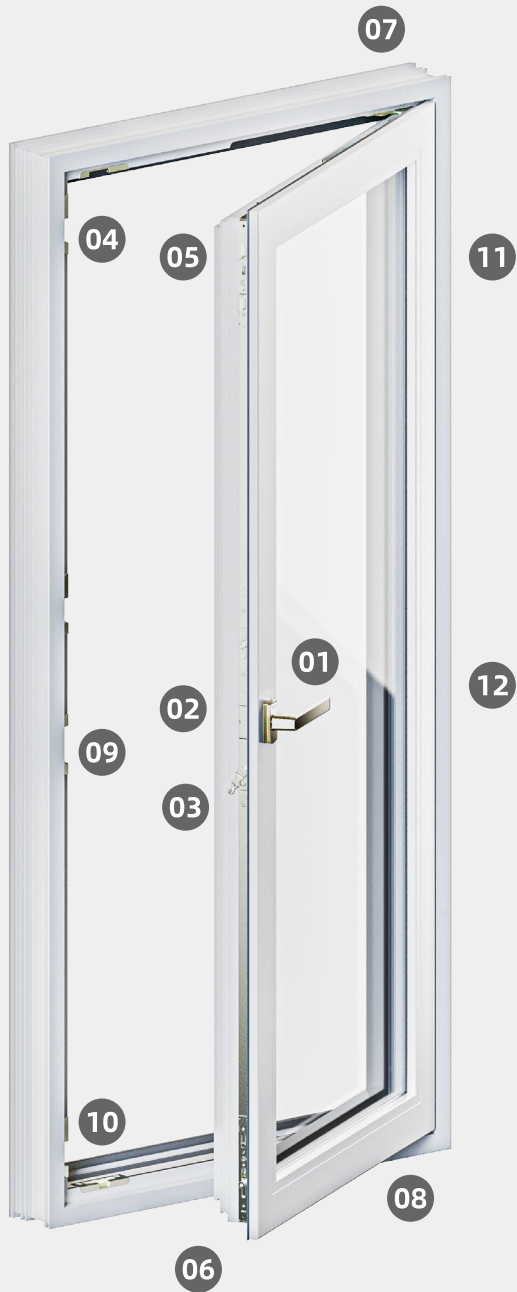

SIVER 4mm安装空间-隐形内平开下悬五金系统

4mm installation space - invisible inner casement lower suspension hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                   | 型号/Code             | 数量/QTY | 备注/Mark                                                                              |
|--------|---------------------------|---------------------|--------|--------------------------------------------------------------------------------------|
| 1      | 执手<br>Handle              | XZS0102             | 1      |                                                                                      |
| 2      | 传动器<br>Actuator           | XPCDQFD41509-12     | 1      | 根据窗型规格选配中心距<br>Optional according to window specifications                           |
| 3      | 防误器<br>Error preventer    | XPFWQR001           | 1      | 分左右<br>Left & right                                                                  |
| 4      | 锁块<br>Lock block          | XPSKFD00713         | 6      | 分左右, 13系, 数量根据锁点配<br>Left & right,13 series,the quantity according to the lock point |
| 5      | 转角器<br>Corner             | XPZJQFD204          | 1      | 可选配<br>Optional                                                                      |
| 6      | 转角器<br>Corner             | XPZJQFD202WTS       | 1      |                                                                                      |
| 7      | 隐形拉杆<br>Invisible tie rod | XPYLGNXR0061305-07P | 1      | 分左右, 13系<br>Left & right,13 series                                                   |
| 8      | 隐形下合页<br>Flip support     | XPYHYXR00613P       | 1      | 分左右, 13系<br>Left & right,13 series                                                   |
| 9      | 防误块<br>Tilt lock block    | XPFWK00513          | 1      | 13系<br>13 series                                                                     |
| 10     | 支撑座<br>Spacer             | XPZCZ00813          | 1      | 13系<br>13 series                                                                     |
| 11     | 转角器<br>Corner             | XPZJQFD203          | 1      |                                                                                      |
| 12     | 边传动杆<br>Side drive rod    | XPBCDGF004          | 1      | 根据窗规格选配<br>Optional according to window specifications                               |

配置说明/Configuration instructions:

- 1.本配置适用于13 系型材。  
This configuration is suitable for 13 series profiles.
- 2.配置选项表适用于窗扇槽高901mm-1200mm 宽522mm-720mm。本套系统选配其他配件可满足，窗扇槽高490mm- 1800mm，宽410mm-720mm，需参考各配件参数，具体见本图册产品系列。建议窗型比例（宽/ 高）保持（W）1： 1.5(H)。  
The configuration option table is suitable for the window sash slot height 901mm-1200mm and width 522mm-720mm. This system can be satisfied with other accessories. The window sash slot height is 490mm-1800mm and width is 410mm-720mm. Please refer to the parameters of each accessory. For details, see the product series in this atlas. It is recommended that the window type ratio (width/height) be maintained at (W) 1:1.5 (H).
- 3.本配置最大承重90kg 。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤ 合页最大承重。  
The maximum load-bearing capacity of this configuration is 90kg. Fan self-weight (total weight of glass, fan profiles and other accessories) x 1.4 (safety factor) ≤ hinge maximum load-bearing.
- 4.合页侧必须安装转角器XPZJQFD203，保证整窗的密封性。  
Corner PZJQ203 must be installed on the hinge side to ensure the sealing of the entire window.
- 5.以上仅供参考，具体请咨询公司技术部。  
The above is for reference only, please consult the company's technical department for details.
- 6.每5000 次反复启闭隐形拉杆、下合页进行润滑养护，保证产品正常使用寿命。  
Every 5000 times the invisible tie rod and lower hinge are repeatedly opened and closed for lubrication and maintenance to ensure the normal service life of the product.

SIVER 框C扇U-隐形内平开下悬五金系统

SIVER Frame C Fan U - invisible inner casement lower suspension hardware system



SIVER 框C扇U-隐形内平开下悬五金系统

Frame C Fan U - invisible inner casement lower suspension hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                   | 型号/Code               | 数量/QTY | 备注/Mark                                                            |
|--------|---------------------------|-----------------------|--------|--------------------------------------------------------------------|
| 1      | 执手<br>Handle              | XZS0102               | 1      |                                                                    |
| 2      | 传动器<br>Actuator           | XPCDQFD41509-12       | 1      | 根据窗型规格选配中心距<br>Optional according to window specifications         |
| 3      | 防误器<br>Error preventer    | XPFWQR001             | 1      | 分左右<br>Left & right                                                |
| 4      | 锁块<br>Lock block          | XPSKFD00613           | 6      | 13系, 数量根据锁点配<br>13 series,the quantity according to the lock point |
| 5      | 转角器<br>Corner             | XPZJQFD204            | 1      | 可选配<br>Optional                                                    |
| 6      | 转角器<br>Corner             | XPZJQFD202            | 1      |                                                                    |
| 7      | 隐形拉杆<br>Invisible tie rod | XPYLGNXR0061305-07PKC | 1      | 分左右, 13系<br>Left & right,13 series                                 |
| 8      | 隐形下合页<br>Flip support     | XPYHYXR00613PKC       | 1      | 分左右, 13系<br>Left & right,13 series                                 |
| 9      | 锁块<br>Lock block          | XPSK10609             | 1      | 起防误块作用<br>Play the role of preventing error blocks                 |
| 10     | 支撑座<br>Spacer             | XPZCZ00713            | 1      | 13系<br>13 series                                                   |
| 11     | 转角器<br>Corner             | XPZJQFD203            | 1      |                                                                    |
| 12     | 边传动杆<br>Side drive rod    | XPBCDGF004            | 1      | 根据窗规格选配<br>Optional according to window specifications             |
| 13     | 限位器<br>Limiter            | XPFC0900FB            | 1      |                                                                    |


配置说明/Configuration instructions:

- 1.本配置适用于13 系型材。  
This configuration is suitable for 13 series profiles.
- 2.配置选项表适用于窗扇槽高901mm-1200mm 宽522mm-720mm。本套系统选配其他配件可满足，窗扇槽高490mm- 1800mm，宽410mm-720mm，需参考各配件参数，具体见本图册产品系列。建议窗型比例（宽/ 高）保持（W）1： 1.5(H)。  
The configuration option table is suitable for the window sash slot height 901mm-1200mm and width 522mm-720mm. This system can be satisfied with other accessories. The window sash slot height is 490mm-1800mm and width is 410mm-720mm. Please refer to the parameters of each accessory. For details, see the product series in this atlas. It is recommended that the window type ratio (width/height) be maintained at (W) 1:1.5 (H).
- 3.本配置最大承重90kg 。扇自重（玻璃、扇型材等辅件总重量）X1.4（安全系数）≤ 合页最大承重。  
The maximum load-bearing capacity of this configuration is 90kg. Fan self-weight (total weight of glass, fan profiles and other accessories) x 1.4 (safety factor) ≤ hinge maximum load-bearing.
- 4.合页侧必须安装转角器XPZJQFD203，保证整窗的密封性。  
Corner PZJQ203 must be installed on the hinge side to ensure the sealing of the entire window.
- 5.以上仅供参考，具体请咨询公司技术部。  
The above is for reference only, please consult the company's technical department for details.
- 6.每5000 次反复启闭隐形拉杆、下合页进行润滑养护，保证产品正常使用寿命。  
Every 5000 times the invisible tie rod and lower hinge are repeatedly opened and closed for lubrication and maintenance to ensure the normal service life of the product.



SIVER U-PVC 隐形内平开下悬五金系统

SIVER U-PVC invisible inner casement lower suspension hardware system

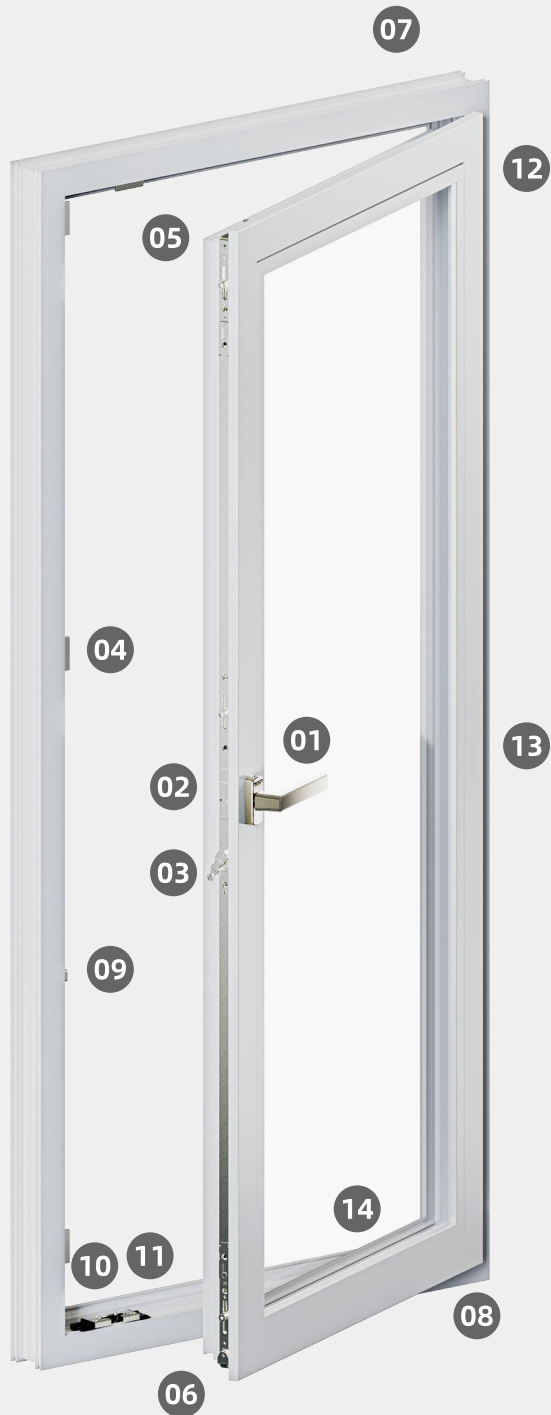

SIVER U-PVC 隐形内平开下悬五金系统

U-PVC invisible inner casement lower suspension hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                   | 型号/Code           | 数量/QTY | 备注/Mark                                                                              |
|--------|---------------------------|-------------------|--------|--------------------------------------------------------------------------------------|
| 1      | 执手<br>Handle              | XZS0102           | 1      |                                                                                      |
| 2      | 传动器<br>Actuator           | XPCDQFD47509-12   | 1      | 根据窗型规格选配中心距<br>Optional according to window specifications                           |
| 3      | 防误器<br>Error preventer    | XPFWQR001         | 1      | 分左右<br>Left & right                                                                  |
| 4      | 锁块<br>Lock block          | XPSKFD00313       | 6      | 分左右, 13系, 数量根据锁点配<br>Left & right,13 series,the quantity according to the lock point |
| 5      | 转角器<br>Corner             | XPZJQFD204        | 1      | 可选配<br>Optional                                                                      |
| 6      | 转角器<br>Corner             | XPZJQFD202        | 1      |                                                                                      |
| 7      | 隐形拉杆<br>Invisible tie rod | XPYLGNXR01305-07A | 1      | 分左右, 13系<br>Left & right,13 series                                                   |
| 8      | 隐形下合页<br>Flip support     | XPYHYXR00313A     | 1      | 分左右, 13系<br>Left & right,13 series                                                   |
| 9      | 防误块<br>Tilt lock block    | XPFWK00113B       | 1      | 13系<br>13 series                                                                     |
| 10     | 支撑座<br>Spacer             | XPZCZ00113        | 1      | 13系<br>13 series                                                                     |
| 11     | 支撑盖<br>Support cover      | XPZCG00113        | 1      | 13系<br>13 series                                                                     |
| 12     | 转角器<br>Corner             | XPZJQFD203        | 1      |                                                                                      |
| 13     | 边传动杆<br>Side drive rod    | XPBCDGFDD004      | 1      | 根据窗规格选配<br>Optional according to window specifications                               |
| 14     | 限位器<br>Limiter            | XPFC0900          | 1      |                                                                                      |

配置说明/Configuration instructions:

- 本配置使用13系型材, 另有9系配置。  
This configuration uses 13 series profiles, with an additional 9 series configurations.
- 配置选项表适用于窗扇槽高901mm-1200mm宽522mm-720mm。  
本套系统选配其他配件可满足, 窗扇槽高490mm1800mm, 宽410mm-720mm, 需参考各配件参数, 具体见本图册产品系列。建议窗型比例(宽/高)保持(W)1:1.5(H)。  
The configuration option table is suitable for the window sash groove height 901mm-1200mm and the width 522mm-720mm. This system can be satisfied with other accessories. The window sash groove height is 490mm1800mm and the width is 410mm-720mm. Please refer to the parameters of each accessory. For details, see the product series in this atlas. It is recommended that the window type ratio (width/height) be maintained at (W) 1:1.5 (H).
- 本配置最大承重90kg, 承重级别取决于合页,可参考合页系列;  
扇自重(玻璃和扇型材总重量)X1.4(安全系数)≤合页最大承重。  
The maximum load-bearing capacity of this configuration is 90kg, and the load-bearing level depends on the hinge. Please refer to the hinge series;  
Fan weight (total weight of glass and fan profile) X1.4 (safety factor) ≤ maximum load-bearing hinge.
- 合页侧必须安装转角器 XPZJQFD203, 保证整窗的密封性。  
Corner PZJQ203 must be installed on the hinge side to ensure the sealing of the entire window.
- 每 5000 次反复启闭隐形拉杆、下合页进行润滑养护, 保证产品正常使用寿命。  
Every 5000 times the invisible tie rod and lower hinge are repeatedly opened and closed for lubrication and maintenance to ensure the normal service life of the product.
- 以上仅供参考, 具体请咨询公司技术部。  
The above is for reference only, please consult the company's technical department for details.

SIVER 实木隐形内平开下悬五金系统

SIVER Solid wood invisible inner casement lower suspension hardware system



SIVER 实木隐形内平开下悬五金系统

Solid wood invisible inner casement lower suspension hardware system

配置清单 Accessories List

| 序号/No. | 名称/Name                       | 型号/Code            | 数量/QTY | 备注/Mark                                                     |
|--------|-------------------------------|--------------------|--------|-------------------------------------------------------------|
| 1      | 执手<br>Handle                  | XZS0102            | 1      |                                                             |
| 2      | 传动器<br>Actuator               | XNCDQFD41507-09    | 1      | 根据窗型规格选配中心距<br>Optional according to window specifications  |
| 3      | 防误块<br>Error prevention block | XPFWK00118A        | 1      |                                                             |
| 4      | 防误器<br>Error preventer        | XPFWQR001          | 1      | 分左右<br>Distinguish left and right                           |
| 5      | 转角器<br>Corner                 | XPZJQFD204         | 1      | 可选配<br>Optional                                             |
| 6      | 转角器<br>Corner                 | XNZJQFD201         | 1      |                                                             |
| 7      | 隐形拉杆<br>Invisible tie rod     | XPYLGNXR0051305-07 | 1      | 分左右, 13系<br>Left & right, 13 series                         |
| 8      | 隐形下合页<br>Flip support         | XPYHYXR00413P      | 1      | 分左右, 13系<br>Left & right, 13 series                         |
| 9      | 锁块<br>Lock block              | XPSKFD00118        | 6      | 数量根据锁点配置<br>Quantity is configured according to lock points |
| 10     | 提升块<br>Lift block             | XWTSK001           | 1      |                                                             |
| 11     | 倾转锁块<br>Tilt lock block       | XNQZSZ00424        | 1      |                                                             |
| 12     | 转角器<br>Corner                 | XPZJQFD203         | 1      |                                                             |
| 13     | 边传动杆<br>Side drive rod        | XPBCDGF0004        | 1      | 根据窗规格选配<br>Optional according to window specifications      |
| 14     | 限位器<br>Limiter                | XPFC0900FB         | 1      |                                                             |

配置说明/Configuration instructions:

- 1.本配置使用13系型材, 另有9系配置。  
This configuration uses 13 series profiles, with an additional 9 series configurations.
- 2.配置选项表适应于窗扇槽高701mm-900mm宽522mm-720mm。  
本套系统选配其他配件可满足, 窗扇槽高570mm-1800mm宽410mm-720mm, 需参考各配件参数, 具体见本图册产品系列。建议窗型比例(宽/高)保持(W)1:1.5(H)。  
The configuration option table is suitable for the window sash slot height 701mm-900mm and width 522mm-720mm. This system can be satisfied with other accessories. The window sash slot height is 570mm-1800mm and width is 410mm-720mm. Please refer to the parameters of each accessory. For details, see the product series in this atlas. It is recommended that the window type ratio (width/height) be maintained at (W) 1:1.5 (H).
- 3.本配置最大承重90kg, 承重级别取决于合页,可参考合页系列;  
扇自重(玻璃和扇型材总重量)X1.4(安全系数)≤合页最大承重。  
The maximum load-bearing capacity of this configuration is 90kg, and the load-bearing level depends on the hinge. Please refer to the hinge series;  
Fan weight (total weight of glass and fan profile) X1.4 (safety factor) ≤ maximum load-bearing hinge.
- 4.每 5000 次反复启闭进行润滑养护, 保证产品正常使用寿命。  
Lubrication and maintenance are carried out every 5000 times to ensure the normal service life of the product.
- 5.以上仅供参考, 具体请咨询公司技术部。  
The above is for reference only, please consult the company's technical department for details.





隐形拉杆

Concealed connect rod

XPYLGNXR0061305-07P

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢



Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：13系,分左右

Parameters : For 13 series, distinguish left and right

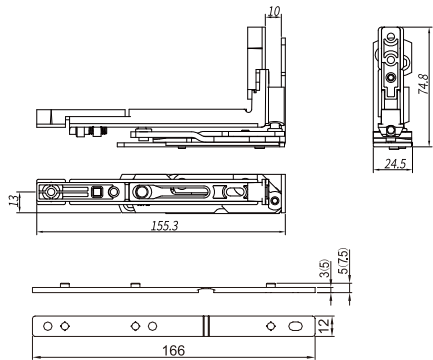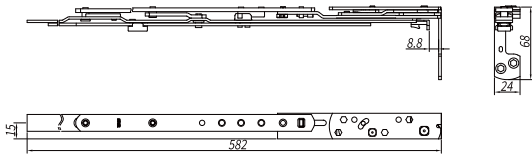

隐形下合页

Hidden hinge

XPYHYXR00613P

适用系统：内平开窗、内平开下悬窗

Applicable system : Inner casement window, Turn-and-tilt window

材质：碳钢

Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：13系,分左右

Parameters : For 13 series, distinguish left and right



隐形拉杆

Concealed connect rod

XPYLGNXR0061305-07PKC

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢



Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：用于13系框C扇U型材,分左右

Parameters : For 13 series plastic steel, distinguish left and right

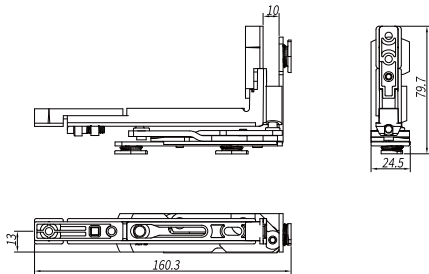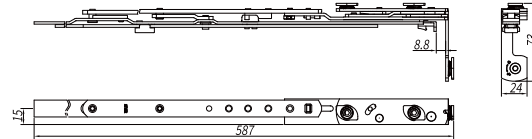

隐形下合页

Hidden hinge

XPYHYXR00613PKC

适用系统：内平开窗、内平开下悬窗

Applicable system : Inner casement window, Turn-and-tilt window

材质：碳钢

Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：用于13系框C扇U型材,分左右

Parameters : For 13 series frame C fan U profile, distinguish left and right



隐形拉杆

Concealed connect rod

XPYLGNXR01305-07A

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢



Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：用于13系塑钢,分左右

Parameters : For 13 series plastic steel, distinguish left and right

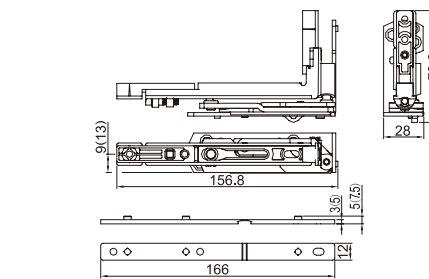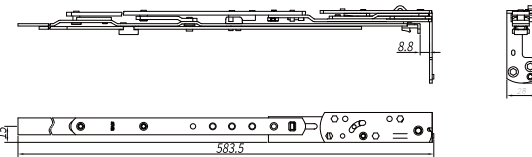

隐形下合页

Hidden hinge

XPYHYXR00313A

适用系统：内平开窗、内平开下悬窗

Applicable system : Inner casement window, Turn-and-tilt window

材质：碳钢


Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：用于13系塑钢,分左右

Parameters : For 13 series plastic steel, distinguish left and right

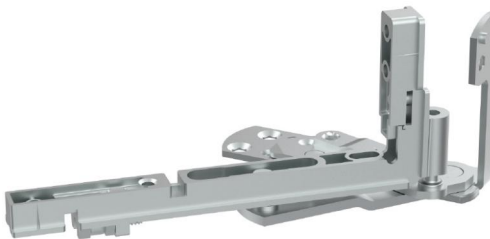

隐形拉杆

Concealed connect rod

XPYLGNXR0051305-07

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢



Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：用于13系实木,分左右

Parameters : For 13 series solid wood, distinguish left and right

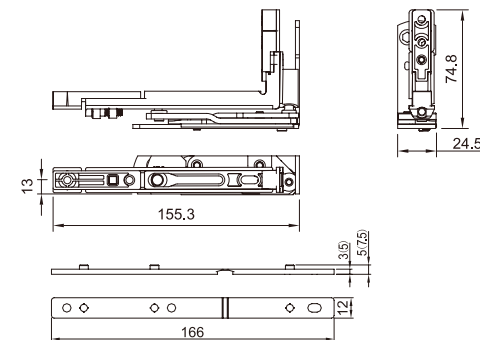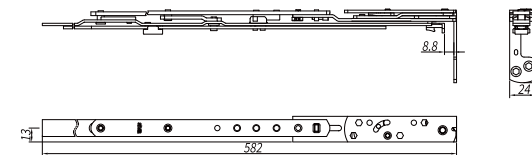

隐形下合页

Hidden hinge

XPYHYXR00413P

适用系统：内平开窗、内平开下悬窗

Applicable system : Inner casement window, Turn-and-tilt window

材质：碳钢


Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：用于13系实木,分左右

Parameters : For 13 series solid wood, distinguish left and right

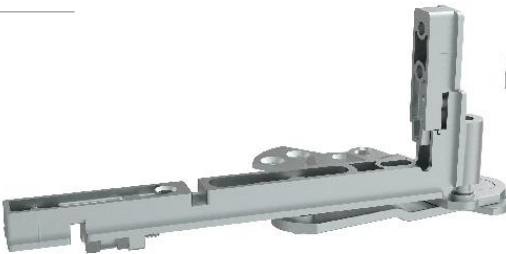



传动器  
Actuator

XPCDQFD41507-09

XPCDQFD41509-12

XPCDQFD41512-16

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢

Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块，中心距15mm


Parameters : Use with anti-pickle lock block, center distance 7.5mm

09、12、16多种长度可选

09, 12, 16 various lengths are available

不包含防误器

No error preventer included



传动器  
Actuator

XPCDQFD47507-09

XPCDQFD47509-12

XPCDQFD47512-16

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢

Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块，中心距7.5mm


Parameters : Use with anti-pickle lock block, center distance 7.5mm

09、12、16多种长度可选

09, 12, 16 various lengths are available

不包含防误器

No error preventer included



传动器  
Actuator

XNCDQFD41507-09

XNCDQFD41509-12

XNCDQFD41512-16

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢

Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块，中心距15mm


Parameters : Use with anti-pickle lock block, center distance 7.5mm

09、12、16多种长度可选

09, 12, 16 various lengths are available

不包含防误器

No error preventer included



转角器  
Corner device

XNZJQFD201

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢



Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块

Parameters : Use with anti-pickle lock block

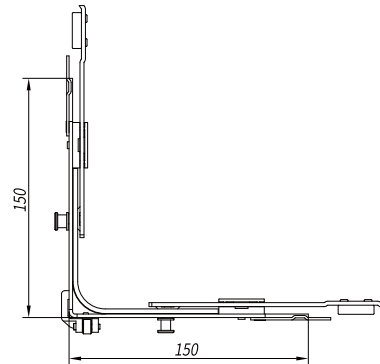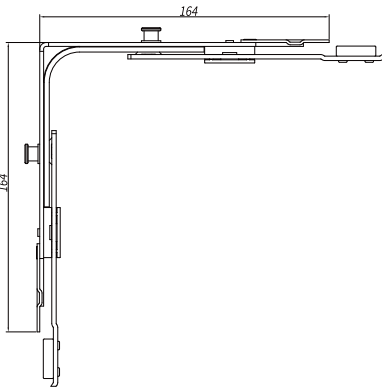

转角器

Corner device

XPZJQFD202

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢


Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块

Parameters : Use with anti-pickle lock block

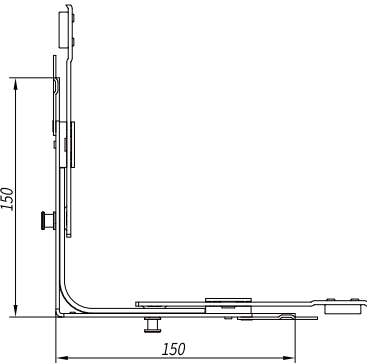

转角器

Corner device

XPZJQFD202WTS

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢


Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块

Parameters : Use with anti-pickle lock block

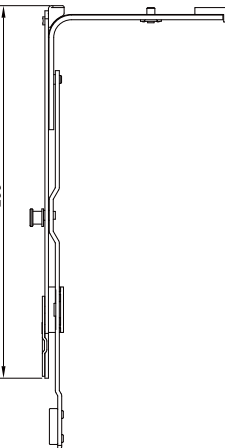

转角器

Corner device

XPZJQFD203

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢


Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块

Parameters : Use with anti-pickle lock block

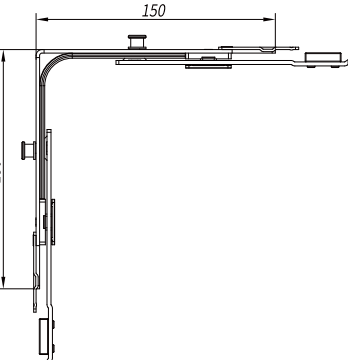

转角器

Corner device

XPZJQFD204

适用系统：内平开下悬窗

Applicable system : Turn-and-tilt window

材质：碳钢

Material : Carbon steel

表面处理：电镀

Surface treatment : Electroplating

技术参数：配合防撬锁块

Parameters : Use with anti-pickle lock block







边传动杆  
Side drive rod

XPBCDGF004  
XPBCDGF006


适用系统：内平开下悬窗  
Applicable system: Turn-and-tilt window

材质：碳钢  
Material: Carbon steel

表面处理：电镀  
Surface treatment: Electroplating

技术参数：配合防撬锁块  
Parameters: Use with anti-picklock lock block

可选配400mm、600mm长度  
Optional 400mm, 600mm length



锁块  
Lock block


XPSKFD00613

适用系统：内平开下悬窗  
Applicable system: Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：电镀  
Surface treatment: Electroplating

技术参数：用于13系框C扇U型材  
Parameters: For 13 series frame C fan U profile



锁块  
Lock block

XPSKFDR00713


适用系统：平开窗、内平开下悬窗  
Applicable system: Casement window, Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：电镀  
Surface treatment: Electroplating

技术参数：用于4mm安装空间U槽型材，分左右  
Parameters: For 4mm installation space U-slot profiles, divided into left and right

配合防撬锁块  
Use with anti-picklock lock block



锁块  
Lock block


XPSKFD00118

适用系统：内平开下悬窗  
Applicable system: Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：电镀  
Surface treatment: Electroplating

技术参数：配合防撬锁块  
Parameters: Use with anti-picklock lock block

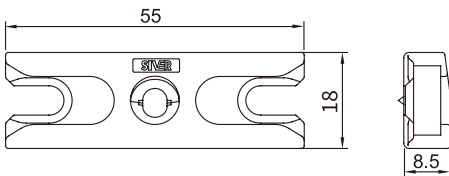

锁块  
Lock block


XPSKFD00313

适用系统：平开窗、内平开下悬窗  
Applicable system: Casement window, Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：电镀  
Surface treatment: Electroplating

技术参数：用于13系塑钢型材  
Parameters: For 13 series plastic steel profiles

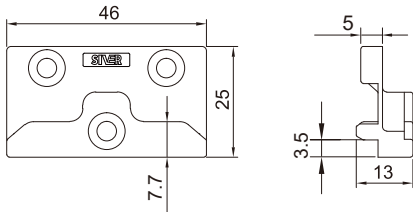

锁块  
Lock block

XPSK10609


适用系统：内平开下悬窗  
Applicable system: Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：电镀  
Surface treatment: Electroplating

技术参数：用于13系框C扇U型材  
Parameters: For 13 series frame C fan U profile

配合防误器PFWQR001使用  
Use with error preventer PFWQR001



防误器  
Error preventer


XPFWQR001

适用系统：内平开下悬窗  
Applicable system: Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：电镀  
Surface treatment: Electroplating

技术参数：配合传动器使用，分左右  
Parameters: Use with actuator, distinguish between left and right



防误块  
Error prevention block


XPFWK00513

适用系统：平开窗、内平开下悬窗  
Applicable system: Casement window, Turn-and-tilt window

材质：锌合金  
Material: Zinc alloy

表面处理：电镀  
Surface treatment: Electroplating

技术参数：用于4mm安装空间  
Parameters: For 4mm installation space




防误块

Error prevention block XPFWK00113B



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 锌合金  
Material: Zinc alloy  
表面处理: 电镀  
Surface treatment: Electroplating  
技术参数: 用于13系塑钢型材  
Parameters: For 13 series plastic steel profiles




防误块

Error prevention block XPFWK00118A



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 锌合金  
Material: Zinc alloy  
表面处理: 电镀  
Surface treatment: Electroplating  
技术参数: 用于实木型材  
Parameters: For solid wood profiles




支撑座

Support seat XPZCZ00813



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 锌合金  
Material: Zinc alloy  
表面处理: 电镀  
Surface treatment: Electroplating  
技术参数: 用于4mm安装空间U槽型材  
Parameters: For 4mm installation space U-slot profiles




支撑座

Corner device XPZCZ00713




适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 碳钢+工程塑料  
Material: Carbon steel + engineering plastics  
表面处理: 电镀  
Surface treatment: Electroplating  
技术参数: 用于13系框C扇U型材  
Parameters: For 13 series frame C fan U profile

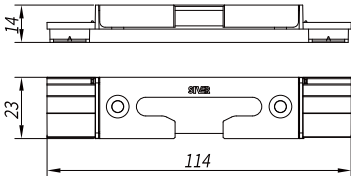


支撑座

Support seat XPZCZ00313




适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 工程塑料  
Material: Engineering Plastics  
技术参数: 配合支撑盖使用  
Parameters: Use with support cover

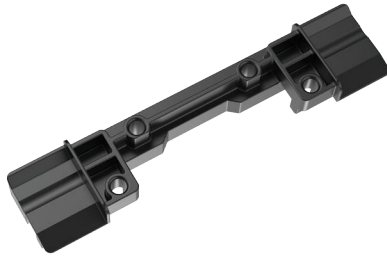

支撑盖

Support cover XPZCG00113




适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 碳钢  
Material: Carbon steel  
表面处理: 电镀  
Surface treatment: Electroplating  
技术参数: 配合支撑座使用  
Parameters: Use with support seat



提升块

Lifting block XWTSK001




适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 工程塑料  
Material: Engineering Plastics  
技术参数: 用于实木型材  
Parameters: For solid wood profiles



倾转锁座

Tilt lock seat XNQZS00424



适用系统: 内平开下悬窗  
Applicable system: Turn-and-tilt window  
材质: 碳钢+工程塑料  
Material: Carbon steel + engineering plastics  
表面处理: 电镀  
Surface treatment: Electroplating  
技术参数: 用于13系实木型材  
Parameters: For 13 series solid wood profiles







限位器  
Limiter


XPFC0900FB

适用系统: 平开窗、内平开下悬窗  
Applicable system: Casement window, Turn-and-tilt window

材质: 碳钢  
Material: Carbon steel

表面处理: 电镀  
Surface treatment: Electroplating

技术参数: 用于框C扇U、实木型材  
Parameters: For frame C fan U, solid wood profiles

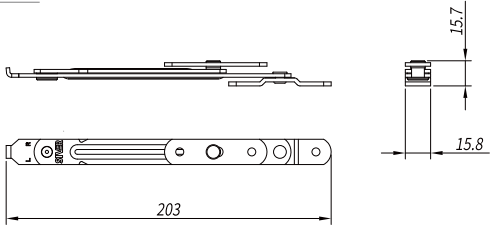

限位器  
Limiter


XPFC0900

适用系统: 平开窗、内平开下悬窗  
Applicable system: Casement window, Turn-and-tilt window

材质: 碳钢  
Material: Carbon steel

表面处理: 电镀  
Surface treatment: Electroplating

技术参数: 用于塑钢型材  
Parameters: For plastic steel profiles

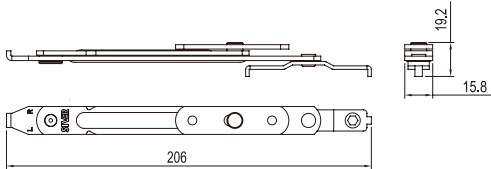

\* All rights reserved.  
\* 版权由坚朗公司所有, 严禁翻版和影印。  
\* 本公司产品已申请中国专利, 严禁仿制, 违者负法律责任。  
\* 2025年1月印刷

SIVER 西菲尔

www.sivereuro.com

SIVER 西菲尔

源自欧洲 始于1904  
Originated from Europe Since 1904

Door And Window Hardware Product Catalog 门窗五金产品目录

门窗五金产品目录  
Door And Window Hardware Product Catalog



广东坚朗五金制品股份有限公司  
Guangdong Kinlong Hardware Products Co., Ltd.  
广东省东莞市塘厦镇坚朗路3号  
No.3,Jian Lang Rd.,Tangxia Town,Dongguan City,Guangdong Province,China  
T: 0769-82166666 82136666 H: www.kinlong.com  
F: 0769-82955240 82955241 E: mail@kinlong.com